
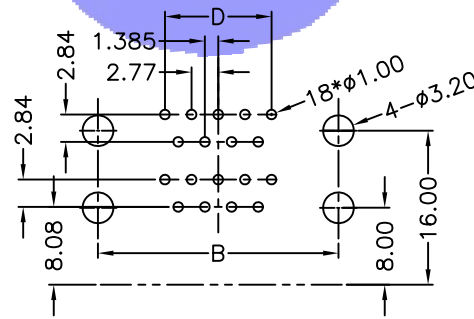
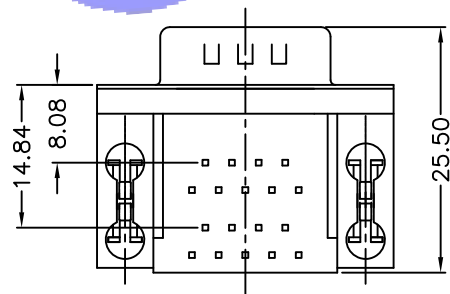
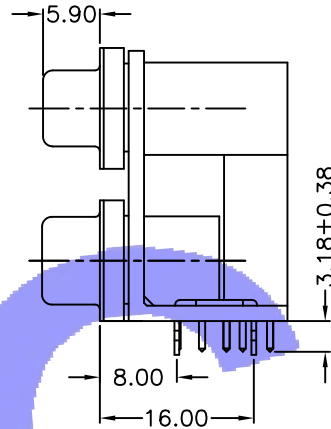


RoHS PASS

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			NEW RELEASED	08/16'11	yangliu

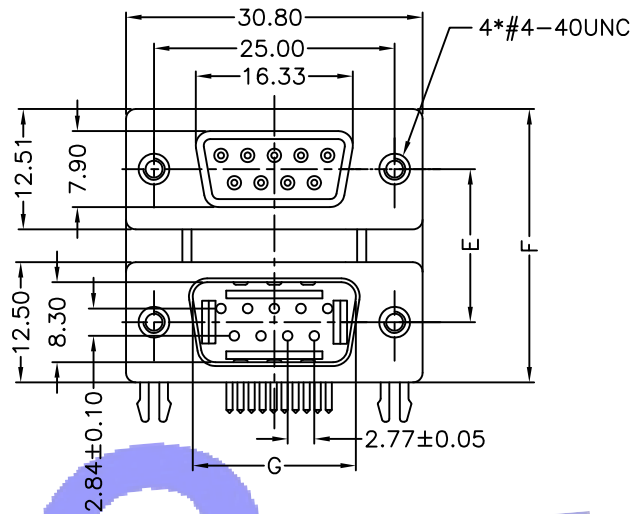

Recommended P.C.B. Layout
Tolerances:±0.05

DIM	TOL	DEC	TOL
X.	±1.0	X.*	±1"
X.X	±0.38	X.X*	±0.5"
X.XX	±0.25	X.XX*	
X.XXX	±0.10	X.XXX*	

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 3 Amperes.
Dielectric Withstanding Voltage: AC 1000 V r.m.s.
Insulation Resistance: 1000 Megohms Minimum
at DC 500V.

Contact Resistance: 30 Milliohms Maximum.
Operating Temperature: -55°C~85°C.

MATERIALS:

Contacts: Copper Alloy.

Insulator: PBT+Glass Fiber, UL 94V-0 Rated.

Shell: SPCC .

Grounding Bracket: Zinc Alloy .

Fish Sperm: Copper Alloy .

DSBX-181X-XXR0-1X
5-ROHS

Option(E-F):
S-S TYPE(15.88-28.43)
M-M TYPE(19.05-31.60)
L-L TYPE(22.86-35.51)

Contact Finish:
1-Gold Flash
2-Selective Gold 3u"
5-Selective Gold 15u"
7-Selective Gold 30u"
A-Gold Plated

Shell Finish:
N-Nickel

Insulator Color:
K-Black
B-Blue
2-9F(Black) and 9M(Green)

e-Conn

苏州正耀电子有限公司
ELECTRONIC(SU-ZHOU) CO., LTD

DRAW NO:	DATE	MATERIAL:	DRAW NAME:
DESIGN:		FINISH: /	DR F/M RIGHT ANGLE TYPE
CHECK:		FILE: /	MODEL:
REVIEW:		P/N NO: DSBX-181X-XXR0-1X	UNIT: mm
APPROVED:		REV: AO SCALE: N/A	SHEET 1/1