
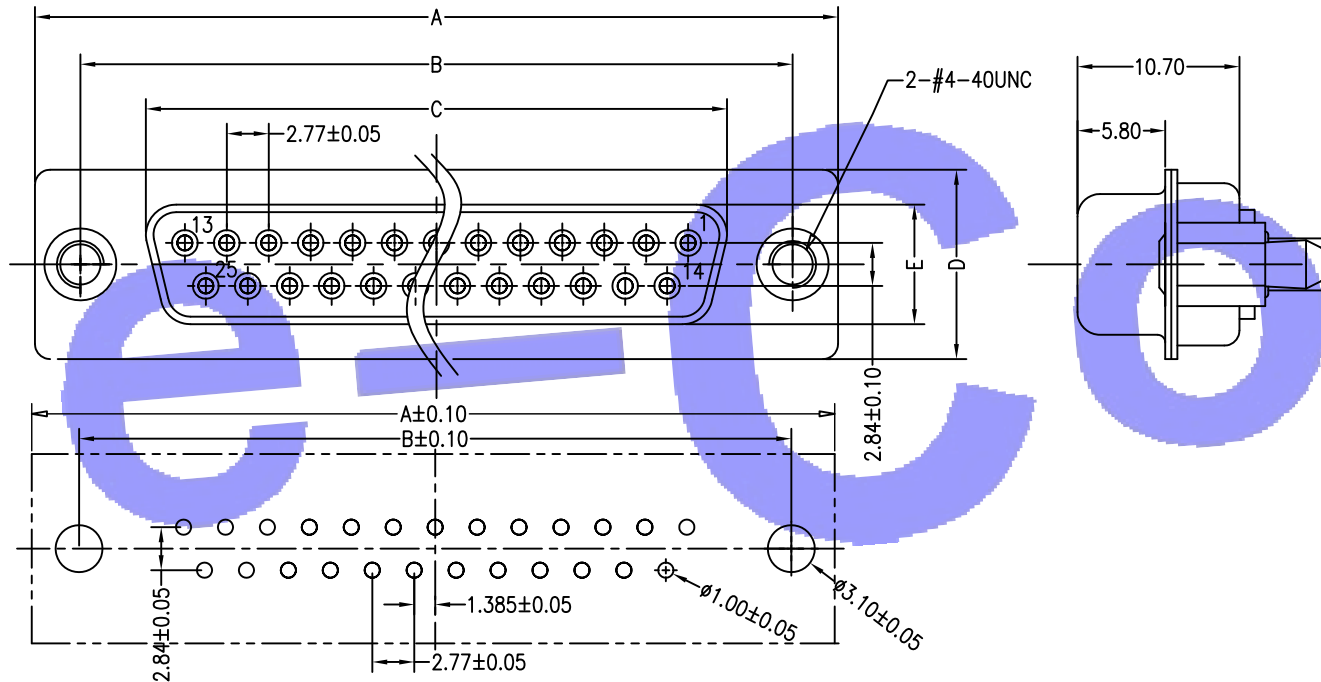


RoHS PASS

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			NEW RELEASED	08/18'07	James

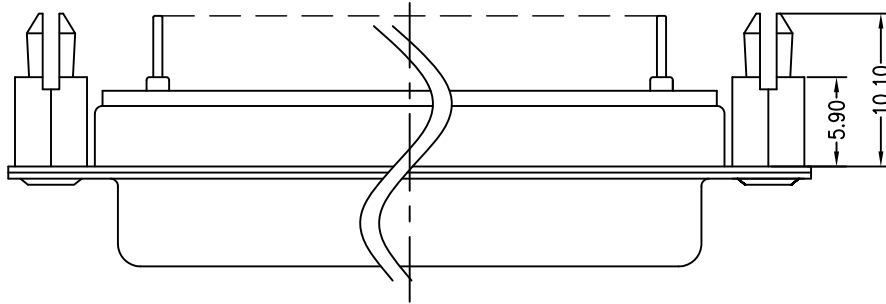

Recommended P.C.B. Layout

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amperes.

Dielectric Withstanding Voltage: AC 1000 V r.m.s.

Insulation Resistance: 1000 Megohms Minimum
at DC 500V.

Contact Resistance: 25 Milliohms Maximum.

Operating Temperature: -55°C~105°C

MATERIALS:

Contacts: Copper Alloy.

Insulator: PBT+Class Fiber, UL 94V-0 Rated

Shell: Cold Roller Steel.

Nut: Copper Alloy.

DSBX-XXFX-XXD0-YP

5-ROHS

Pin Number

09-9PIN

15-15PIN

25-25PIN

37-37PIN

Shell Finish:

1-Front Ni & Back Tin

T-Tin

Insulator Color:

K-Black

B-Blue

W-White

Contact Finish:

1-Gold Flash

2-Selective Gold 3u"

3-Selective Gold 5u"

5-Selective Gold 15u"

7-Selective Gold 30u"

A-Gold Plated

Position	A±0.35	B±0.25	C±0.25	D±0.25	E±0.10
DP-09S	30.80	25.00	16.30	12.50	7.90
DP-15S	39.20	33.30	24.60	12.50	7.90
DP-25S	53.05	47.05	38.30	12.50	7.90
DP-37S	69.40	63.50	54.80	12.50	7.90

DIM	TOL	DEC	TOL
X.	±1.0	X.*	±1"
X.X	±0.38	X.X*	±0.5"
X.XX	±0.25	X.XX*	
X.XXX	±0.10	X.XXX*	

e-Conn 苏州正耀电子有限公司
ELECTRONIC(SU-ZHOU) CO., LTD

DRAW NO:	DATE	MATERIAL:	DRAW NAME:
DESIGN:		FINISH: /	D-SUB FEMALE DIP WITH BACK CLAW
CHECK:		FILE: /	MODEL:
REVIEW:		P/N NO: DSBX-XXFX-XXD0-YP	UNIT: mm
APPROVED:		REV: AO SCALE: N/A	SHEET 1/1