
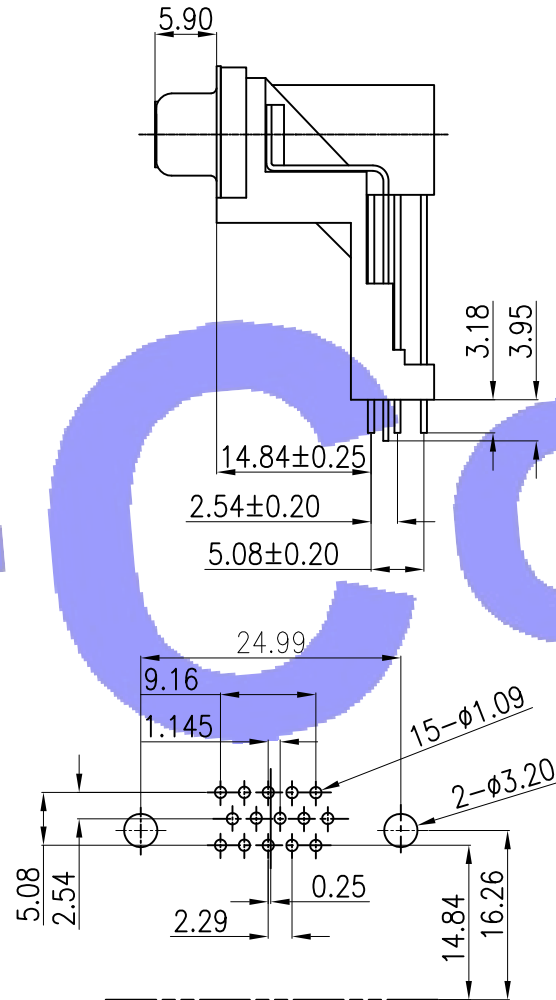


RoHS PASS

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			NEW RELEASED	08/29'12	yangliu

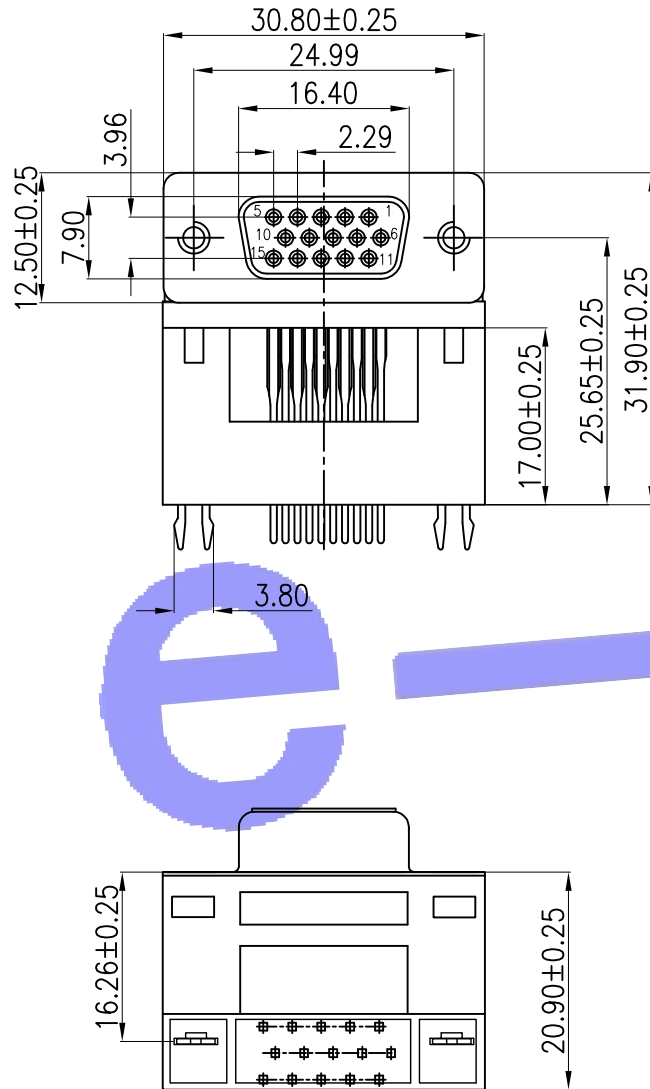

Recommended P.C.B. Layout
Tolerances:±0.05

DIM	TOL	DEC	TOL
X.	±1.0	X.*	±1"
X.X	±0.38	X.X*	±0.5"
X.XX	±0.20	X.XX*	
X.XXX	±0.10	X.XXX*	

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 5 Amperes.

Dielectric Withstanding Voltage: DC 500 V r.m.s.

Insulation Resistance: 1000 Megohms Minimum at DC 500V.

Contact Resistance: 30 Milliohms Maximum.

Operating Temperature: -55°C~105°C

MATERIALS:

Contacts: Brass.

Insulator: PBT, UL 94V-0 Rated .

Shell: Cold Roller Steel.

Screw: Brass.

HDBX-15FX-XXRO-L3

5-ROHS

Shell Plated:
N-Nickel

Insulator Color:
B-Blue.

Contact Finish:

1-Gold Flash

5-Selective Gold 15u"

7-Selective Gold 30u"

e-Conn ELECTRONIC(SU-ZHOU) CO., LTD

DRAW NO:	DATE	MATERIAL:	DRAW NAME:
DESIGN:		FINISH: /	HD-SUB 15PIN FEMALE 90° DIP TYPE
CHECK:		FILE: /	MODEL:
REVIEW:		P/N NO: HDBX-15FX-XXRO-L3	UNIT: mm
APPROVED:		REV: AO	SHEET 1/1
		SCALE: N/A	