
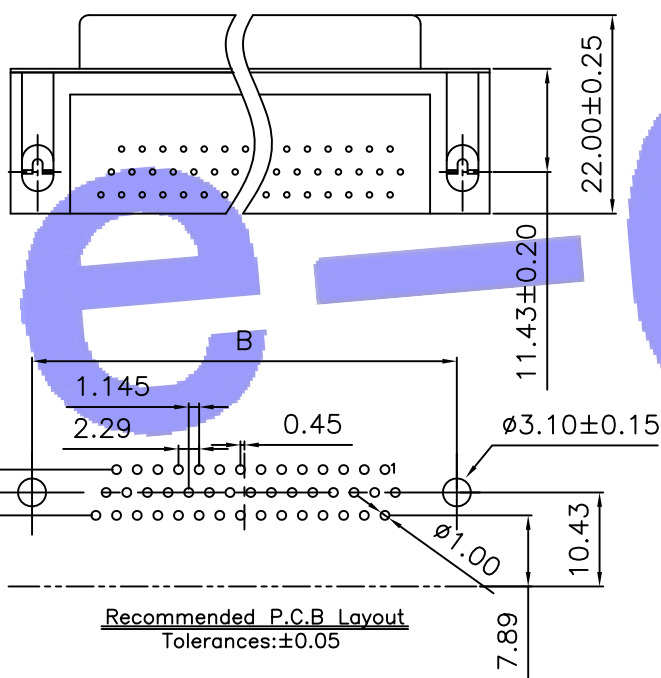


RoHS PASS

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	DESIGN
A1			NEW RELEASED	09/20'07	james

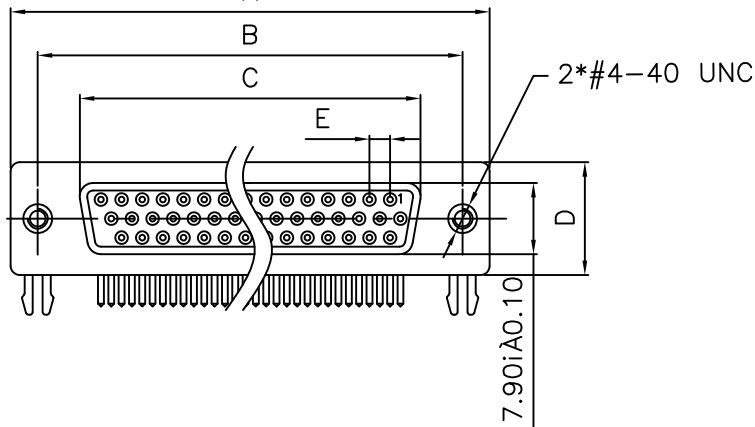

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 3 Amperes.

Dielectric Withstanding Voltage: AC 1000 V r.m.s.

Insulation Resistance: 1000 Megohms Minimum
at DC 500V.

Contact Resistance: 30 Milliohms Maximum.

Operating Temperature: -55°C~85°C.

MATERIALS:

Contacts: Copper Alloy.

Insulator: PBT+Glass Fiber, UL 94V-0 Rated.

Shell: SPCC .

Rivet: Copper Alloy .

Latch: Copper Alloy .

HDBX-XXFX-XXR0-0B

5-ROHS

PIN Number:

15-15Pin

26-26Pin

44-44Pin

62-62Pin

Shell Finish:

N-Nickelage

T-Tinning

Insulator Color:

K-Black

W-White

B-Blue

C-Pantone 322C

D-Pantone 661C

Contact Finish:

1-Gold Flash

3-Selective Gold 5u"

5-Selective Gold 15u"

7-Selective Gold 30u"

Position	A ±0.35	B ±0.25	C ±0.25	D ±0.25	E ±0.05
15S	30.80	25.00	16.30	12.50	2.29
26S	39.20	33.30	24.60	12.50	2.29
44S	53.05	47.05	38.30	12.50	2.29
62S	69.40	63.50	54.80	12.50	2.41

DIM	TOL	DEC	TOL
X.	±1.0	X.*	±1"
X.X	±0.38	X.X*	±0.5"
X.XX	±0.25	X.XX*	
X.XXX	±0.10	X.XXX*	

e-Conn 苏州正耀电子有限公司
ELECTRONIC(SU-ZHOU) CO., LTD

DRAW NO:	DATE	MATERIAL:	DRAW NAME:
DESIGN:		FINISH: /	HD-SUB XXPIN FEMALE RIGHT ANGLE TYPE 8.89mm
CHECK:		FILE: /	MODEL:
REVIEW:		P/N NO:HDBX-XXFX-XXR0-0B	UNIT: mm
APPROVED:		REV: A1 SCALE: N/A	SHEET 1/1