
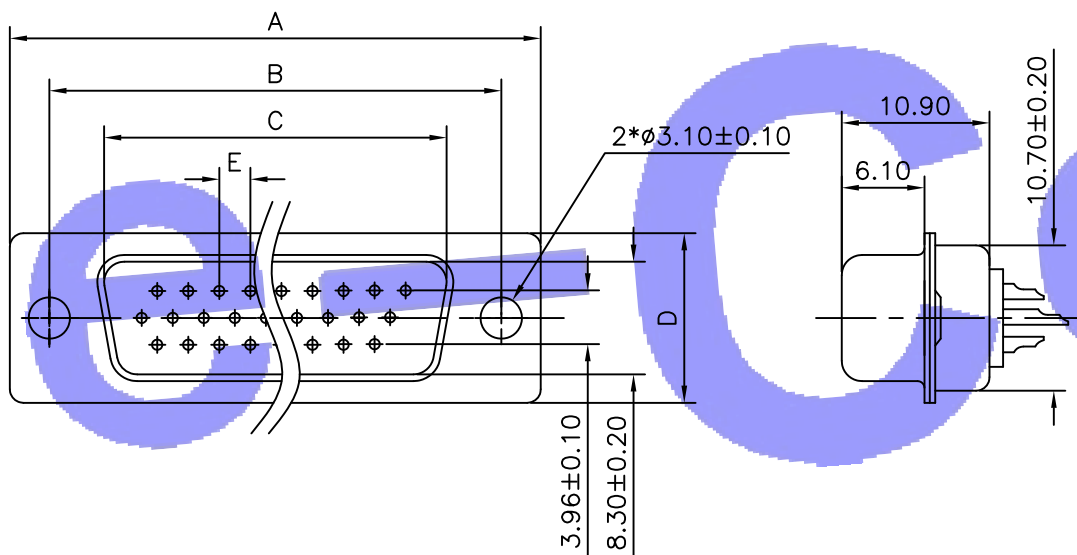


RoHS PASS

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	DESIGN
A2	SZ0907007		PLUS SHELL FINISH(EXPRESS)	07/03'09	yangliu
A3	SZ0907049		ALTER OPERATING TEMPERATURE	09/11'09	Songyufan
A4	SZ1203024		PLUS CONTACT FINISH	01/05'12	yangliu

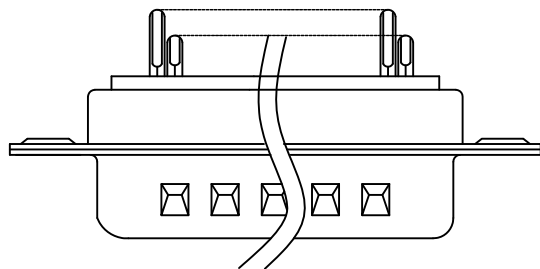

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amperes.

Dielectric Withstanding Voltage: AC 1000 V r.m.s.

Insulation Resistance: 1000 Megohms Minimum at DC 500V.

Contact Resistance: 25 Milliohms Maximum.

Operating Temperature: -55°C~105°C

MATERIALS:

Contacts: Copper Alloy.

Insulator: PBT+Class Fiber, UL 94V-O Rated

Shell: Cold Roller Steel.

HDBX-XXMX-XXSO-00

5-ROHS

PIN Number:

15-15Pin

26-26Pin

44-44Pin

62-62Pin

Shell Finish(Currently):

1-Front Ni & Back Tin

T-Tin

Insulator Color:

K-Black

B-Blue.

W-White

Contact Finish:

1-Gold Flash

2-Selective Gold 3u"

3-Selective Gold 5u"

5-Selective Gold 15u"

7-Selective Gold 30u"

A-Gold Plated

POSITION	A ±0.35	B ±0.25	C ±0.25	D ±0.25	E ±0.05
15P	30.80	25.00	16.90	12.50	2.29
26P	39.20	33.30	25.25	12.50	2.29
44P	53.05	47.05	38.95	12.50	2.29
62P	69.40	61.00	55.40	12.50	2.41

DIM	TOL	DEC	TOL
X.	±1.0	X.*	±1"
X.X	±0.38	X.X*	±0.5"
X.XX	±0.25	X.XX*	
X.XXX	±0.10	X.XXX*	

e-Conn 苏州正耀电子有限公司
ELECTRONIC(SU-ZHOU) CO., LTD

DRAW NO:	DATE	MATERIAL:	DRAW NAME:
DESIGN:		FINISH: /	HD-SUB MALE SOLDER TYPE
CHECK:		FILE: /	MODEL:
REVIEW:		P/N NO:HDBX-XXMX-XXSO-00	UNIT: mm
APPROVED:		REV: A4	SHEET 1/1
		SCALE: N/A	