


P6SPro Instruction

I : APP Download.....	2
II : Device Addition and Edit.....	2
III: PVR Quick Add IPC	7
IV: Preview& Playback.....	9
V : Others.....	10
.....	

I 、 APP Download

1.Scan below QR code to download APP: both Android and IOS.



2.Click main menu  to enter into System Setting----click P2P in Network Setting to reveal QR code. UID QR code will be showed simultaneously if there's UID. Use APP to scan and add.

II 、 Device Addition & Edit


1.**Running APP:**





Click P6SPro icon to run APP.

2.Login:

China Telecom 9:13 AM



 Phone Number/Email

 Please enter password

LOGIN

register new user Forget Password

Local Device

1.Cloud login: The data of added device is stored in cloud; any mobile phone can synchronize with it after login.

New account need to be registered if login in cloud: click【Register New Account】to register via mobile number or email address, then you can login through this account and password.


If you registered before: input account &password, click 【Login】 is ok.


If you forgot password: click 【Forgot Password】 to find it.


2.Local login : Data only can be saved in this mobile phone.

Click 【Local Device】 to login.

3.Device list pages:

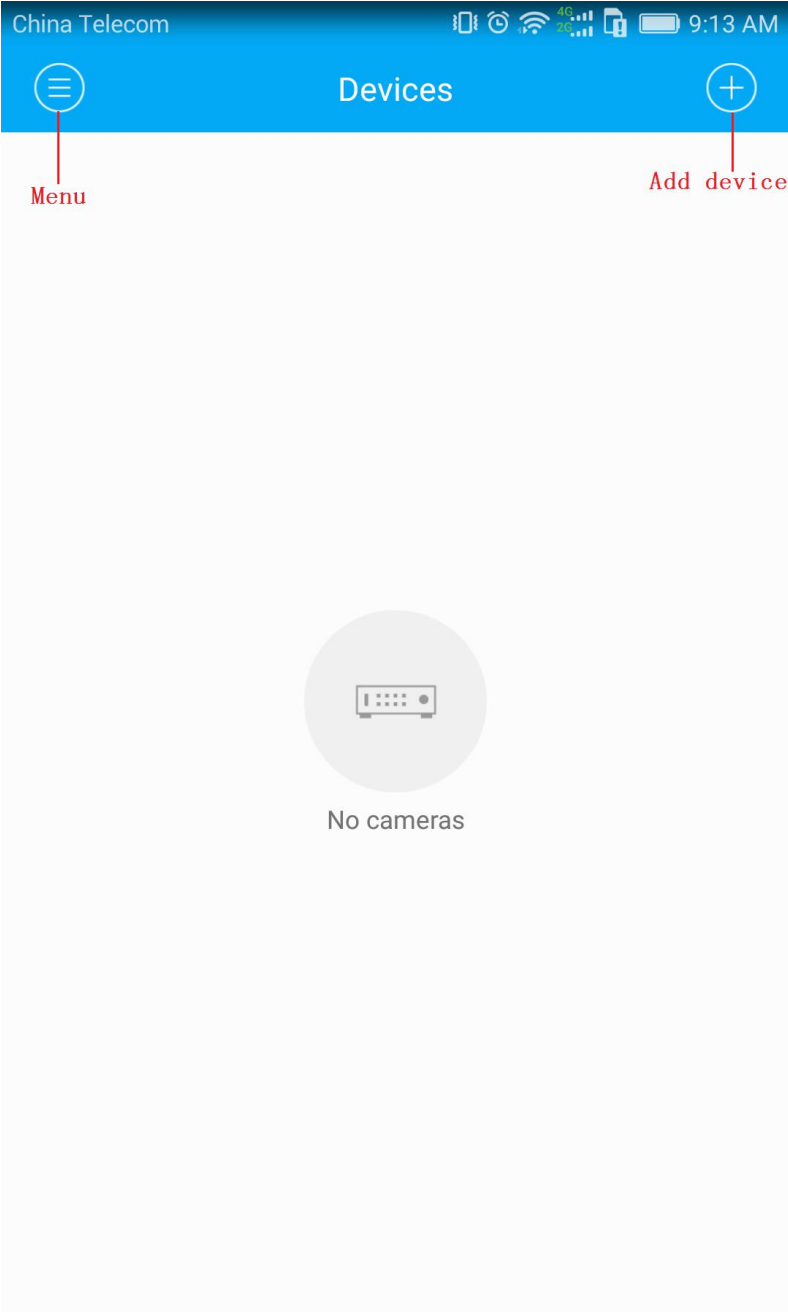

Left  menu icon : Click for more functions

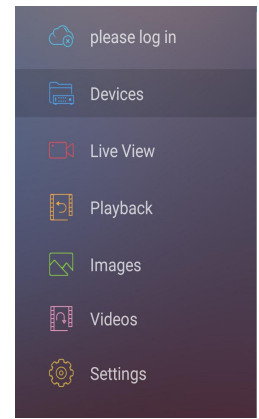

Login first: it reveals if open it in local mode, click and login.


Device management: click to enter into it.

Real-time preview: watching real-time preview screen.


Image management: the images shot from 【Real-time preview】 or 【 Remote playback 】 can be viewed or deleted.

Video management: the video from 【Real-time preview】 can be watched or deleted.

System settings: checking system information and Help.

Right  add icon: click to add device.

Manually addition: input serial number to add manually.



Scanning: click and open phone-camera to scan.

LAN search: search device's serial number in LAN.

QR code from image: click to invoke mobile album, choose QR code image to recognize.

4.Add device:

China Telecom

10:13 AM

Return

Add Camera

Save

Name:

PVR

Customize device's name shown on the list

UID:

BZWYZN-030365-EBSYM

Series number (SN)

UserName:


admin

User name

Security Code:

•••••

Password

According to step 3, click upper-right  , choose an appropriate way to add device.

Add IPC:

Name: input custom name.

UID: the device UID you gained.

User name and password: input the user name and password of device.

Fill in and click **【Save】** is ok.

After adding successfully, **【Device management】** will show the device.

【Online】 and **【Channel QTY】** are the device status.

Click Edit button, you can check and modify device information. (If device reveal error password, it needs you to click and input right user name and password.)

Click device on this page to preview directly.

Page after adding:

Devices

Add device

PVR

BZWYZN-030365-EBSYM

Online

Channel: 4

Status

Channel number

Edit

5.Edit device

←

Edit Camera

⌂

Name:

PVR

UID:

BZWYZN-030365-EBSYM

UserName:

admin

Security Code:

••••••••

Firmware version:

2.1.1-20170608

Device model:

PVR-2504NEJ

Channel Management

>

Channel management

Edit page:


Name/User name/Password: all support edit again.

Firmware version/ device model No.: showing the device's software version and model No.


Channel management: Add/delete the channel of device. (The device needs to support this function, If it's IP camera, then it doesn't have this function.)

III、PVR quick add IPC


1.Open APP, click  in the upper-right to add device.

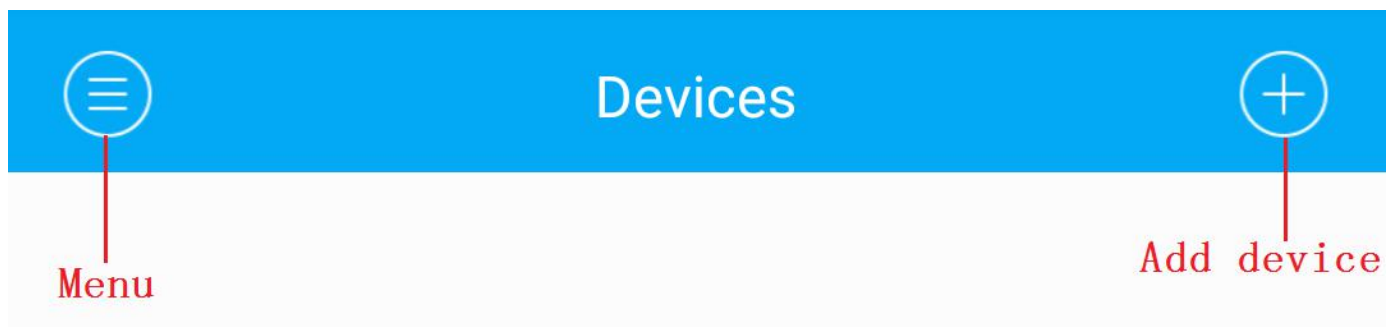


2.Device added successfully and show **【Online】** ,click **【Edit】** .

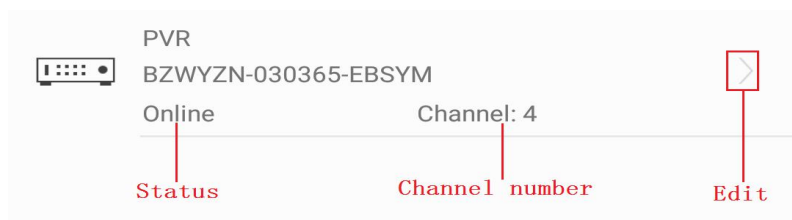


3.Click **【Channel management】** to enter into channel editing page.

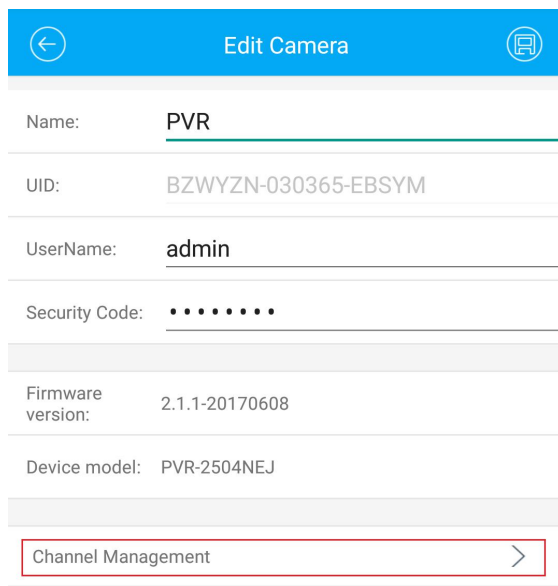

Click **【+】** to add cameras

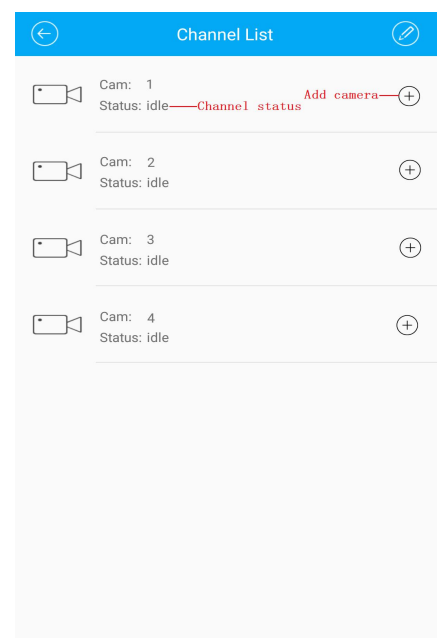

Choose one way to add:

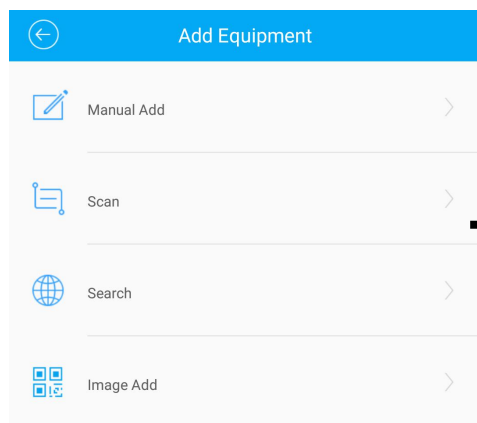

Manual Add

Name:

protocol:

DID:

UserName:


Security Code:

Protocol:
TUTK: TUTK P2P
ZWP2P: Zowell P2P
P6S: Zowell local IP

User name and password: input camera's user name and password

Click the upper-right **【Save】**

After adding:

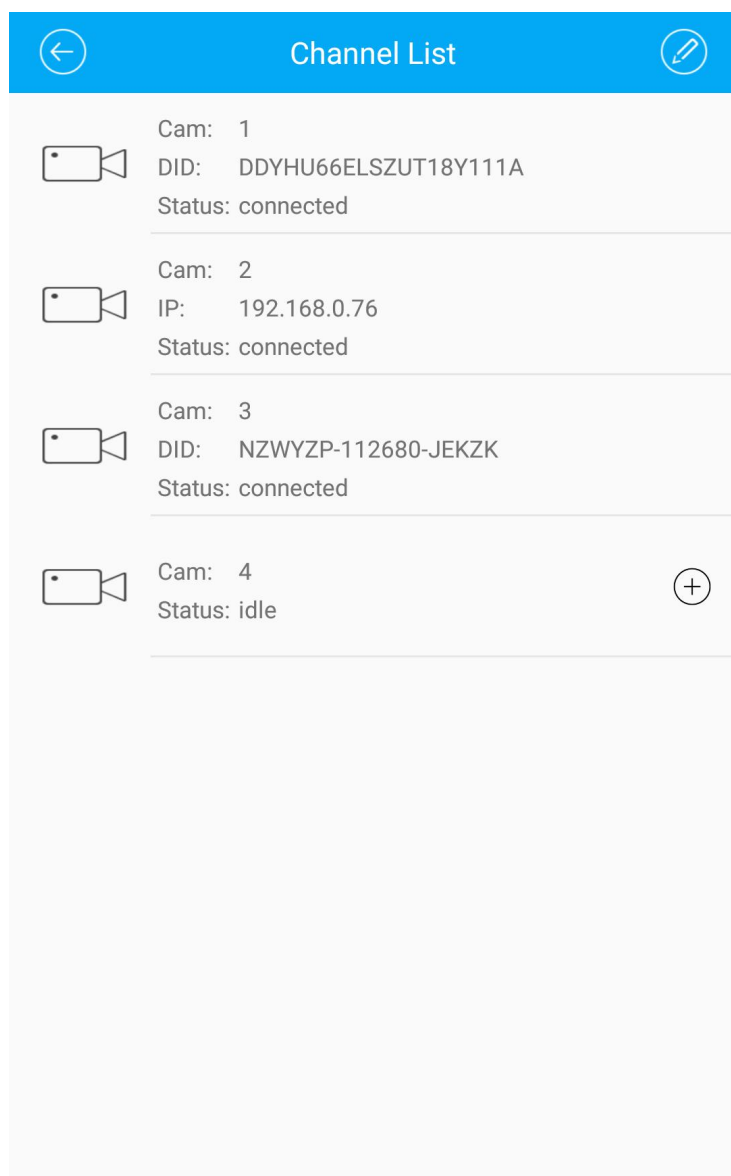

Device will show connected condition after adding, then you can add the next channel. Idle condition means no camera in the channel.

Protocol explanation :

ZWP2P : Zowell's P2P protocol, UID has 19 digits, two **【-】** in the middle, as picture channel 1.

TUTK : TUTK's P2P protocol, UID has 20 digits, as picture channel 2.

P6S : Zowell's LAN IP protocol, type is 192.168.X.X, as picture channel 3.


IV、Preview& Playback

1.Preview:


When device show 【Online】 condition, click it to preview directly.



Real-time preview pages:

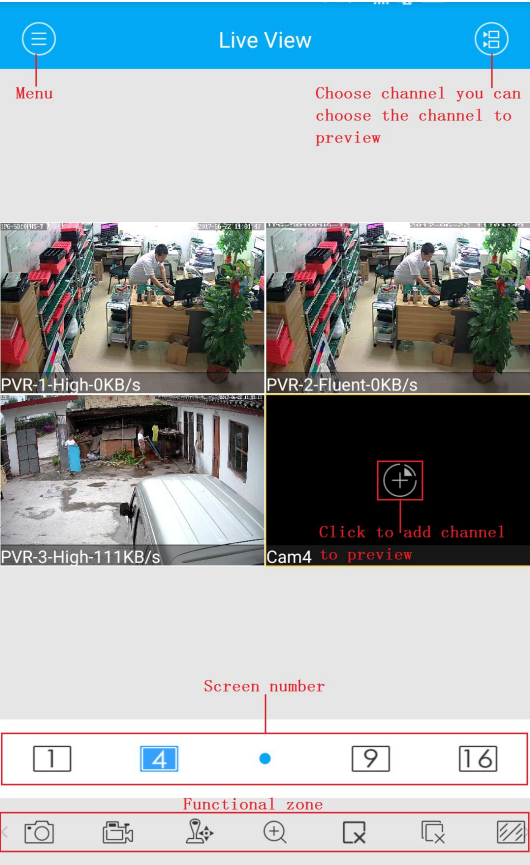

Three preview modes::









- 1.Click device list page, will skip to 【Real-time preview】 to play.
- 2.Click 【Menu】 to enter into 【Real-time preview】 , click the upper-right Choose channels to play.
- 3.Click 【Menu】 to enter into 【Real-time preview】 and click  to choose the channel to play.

Split mode:

It support 1/4/9 image split, 16 is in developing.

Remark: when you open 8 channels and set 4 image split, so two screens will be Divided, you can slide to switch.(Screen1 shows 1-4, screen2 shows 5-8.)




Function:

	Capture		Record
	PTZ		Zoom
	Close Checked		Close All
	Resolution		Audio switch

2.Playback:

Choose Remote Playback in menu.

Click the upper-right channel button or interscreen **【+】** to choose the channel which need to be playbacked. Click **【+】** , will popup device list, choose the channel you need.

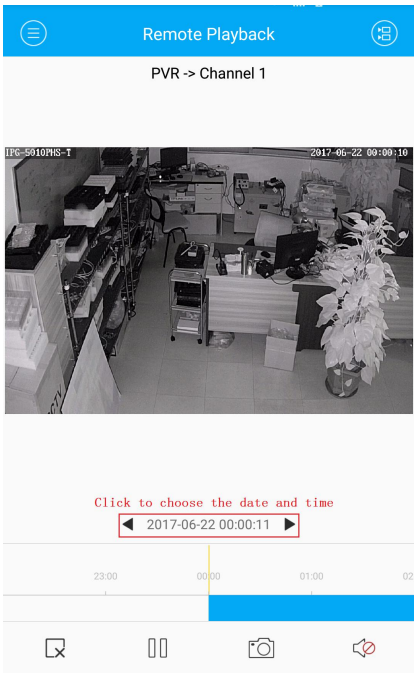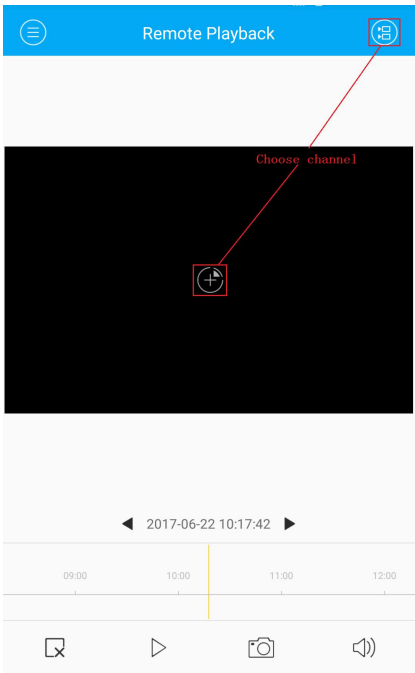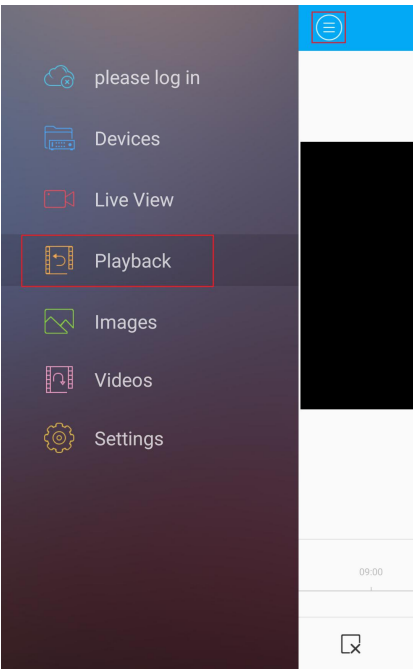

V、Others

Image management:
All snapshots through
[Real-time
Preview]&[Remote Playback]



Video management:
All video through [Real-time Preview]
are saved here. Remark: exterior
broadcaster is required for plaving.



System setting:
Check System Information and
Help Information. Take [Help] for
complete operation.

