

DASUNG 大上科技

25.3英寸Paperlike (革命者) 系列 电子墨水屏显示器说明书

(Mac特别版)

版本号V1.0

本说明书适用于Paperlike 253 (黑武士版本)、Paperlike Color (黑武士版本)

接口及按钮功能

Paperlike (革命者) 25.3英寸墨水屏显示器, 内置了新一代神级高刷, 分为黑白、彩色两大系列。



接口说明:

① 耳机孔: 3.5mm耳机孔, 接耳机使用。当显示器与电脑连接, 并且电脑上设定显示器为音频输出设备时, 此接口会播放电脑音频。

② 标准HDMI: HDMI-A接口, 使用具有HDMI-A接口的线将显示器与电脑连接。

③ Type-C: USB Type-C接口, 使用具有USB Type-C接口的线将显示器与电脑连接。
注: 电脑和线材都需要具有视频传输功能。

④ 标准DP: DisplayPort接口, 使用具有DisplayPort接口的线将显示器与电脑连接。

⑤ ⑧ USB-A (输出) 接口












⑥ USB-B (输入) 接口

注: USB-B (输入) 和3*USB-A (输出) 这几个接口共同组合成为USB-HUB功能, 使用附赠的USB-B的线将显示器与电脑连接后, 3个USB-A即可成为电脑的USB扩展口。

⑦ 电源: 连接显示器的电源线。


按钮说明：


简易功能说明如下：

- ：短按，一键清除残影；长按 5 秒以上，可记忆当前自定义画质模式组合，在下次启动显示器时自动生效
- ：用于切换画质模式
- ：开启、调节前光色温，一键切换“混光 - 冷光 - 暖光 - 关闭前光”状态（注：混光的色温调节须使用客户端软件，使用软件时须用附赠的USB-B数据线将显示器与您的电脑连接。软件下载地址：www.dasung.com）
- ：开启或关闭显示器（显示器直接接上电源时，会自动开机）
- ：增加图像对比度
- ：降低图像对比度
-  +  / ：前光亮度调节
-  + ：重启显示器

参数表

屏幕类型	E Ink电子墨水屏(黑白/彩色Kaleido 3)
显示比例	25.3英寸(16:9)
分辨率	3200×1800
面板涂层	防眩光硬涂层3H
刷新速度	新一代神级高刷(DASUNG God-Level High Refresh)
彩墨算法	新一代DASUNG X-Color Filter原色增强算法(仅彩墨显示器)
自动清残影	DASUNG Auto-Clear自动清残影技术
前光	一键切换, 混光 - 冷光 - 暖光 - 关闭前光
视频接口	HDMI 1.4 DisplayPort 1.2 USB Type-C
供电	工作电压范围:5~20V 输入功率:12W以上 接口型号:DC-005 *消费者应使用获得CCC认证并满足标准要求的电源适配器
温度	最佳温度:15℃~35℃ 使用温度:0℃~50℃ 存放温度:-25℃~70℃
配件	说明书 1.5m USB-A to USB-B线材 1.5m HDMI-A to HDMI-A线材
尺寸	606mm×390mm×13mm(革命者)

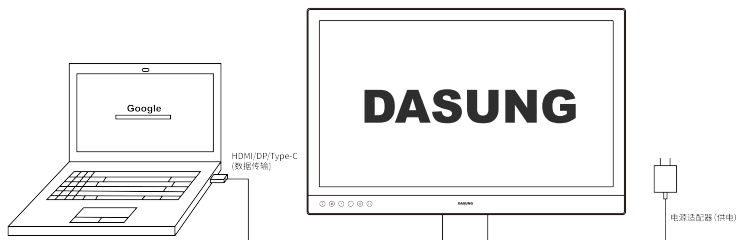


重要提示:为了更好的保护您的显示器屏幕,在关闭显示器时,请先按显示器的电源键“”关机,再拔掉显示器的电源适配器。

连接方式



- ① 运行Paperlike电脑客户端:使用配送的USB-A to USB-B 线材,将电脑与显示器连接,然后下载Paperlike电脑客户端,安装并运行。
- ② 供电:使用满足规格电源适配器的,将显示器与交流电相连。供电后,显示器会自动开机,并检测信号。
- ③ 连接视频信号线:使用HDMI、DisplayPort、USB Type-C任意一个接口,将显示器与电脑或者手机相连,即可使用。如果同时接上了多个视频信号,优先选择HDMI。
- ④ 调节显示效果:使用按钮可以调节画质模式、对比度。

详细功能说明

画质模式

调节方式:  按钮,画质模式会调整图像算法,并默认选择较为合适的对比度,以适应多种场景。每种模式下,依然可以自由调节对比度。

对比度

显示器内置9档对比度:当看图片视频等图像内容较多画面时,建议调浅对比度;看文字为主的页面时,建议调深对比度。调节方式:  /  按钮



前光

Paperlike (革命者) 系列显示器精心研制超大尺寸前光,柔和、均匀、优质,冷光暖光、混光,可自由切换,亮度可调节,亦可完全关闭,白天黑夜均可使用。

视频通路选择与切换功能

显示器有三路视频输入: HDMI、Type-C、DP, 支持同时接上多个视频信号并手动 / 自动选中其中一路信号。

自动切换: 当有多路视频信号同时接入的时候, 按照 HDMI>Type-C>DP 的顺序进行自动选中;

手动切换: 按下  + , 可以手动切换视频输入线路。

详细功能说明

USB 3.0扩展坞功能

使用附赠的USB-A to USB-B 3.0线材, 将电脑与显示器连接, 显示器上的USB-A接口就直接连在了电脑上, 成为了电脑的扩展 USB3.0 接口。

音频功能

当电脑与Paperlike(革命者)系列显示器相连时, 音频可以通过 3.5mm耳机口播放。注意: 第一次连接显示器时, win10 系统可能会自动切换“播放设备”为 Paperlike显示器, 此时您的电脑扬声器会没有声音。可以在系统的音频设置中选择播放设备切换。

保修条款

质保服务如下：

- 1、Paperlike(革命者)系列电子墨水显示器实施国家法定质保一年。
- 2、中国大陆之外的地区或国家暂无售后地点，仅提供网络或电话支援

【以下情况不在质保范围内】

为了使您的合法权益受到保护，避免不必要的损失，对于下列原因导致设备故障或损坏，我公司不承担保修义务，请您选择有偿服务。

- 超过质保有效期；
- 无有效的质保凭证；
- 未按产品使用说明书要求安装使用、维护、保养而造成损坏的（人为损坏）；
- 非大上科技授权的修理者拆动造成损坏的（私自拆修）；
- 屏幕出厂可能自带符合标准数量的坏点（ ≤ 10 个），这不在质保范围内，不能因此退换货；
- 屏幕出厂可能自带符合标准数量的前光亮点（ ≤ 10 个）属正常范围；
- 产品表面外壳的自然老化、碰伤及划痕；
- 意外因素或人为行为及外力造成损坏（包括操作失误、输入不合适的电压等）；
- 使用了非标准或未公开发行的软件或非标准的相关电脑部件；
- 自然灾害等不可抗力造成的损坏（如：地震、火灾、水灾等）；

*对于免费保修范围外的服务，我们将收取一定费用，收费标准=技术服务费+更换零件费+物流快递费

保修卡信息

用户资料

产品名称	
产品型号/条形码	
订单号	
用户姓名	
联系电话/邮箱	
地址	

保修记录

维修日期	故障及处理方法	完成日期	维修人员签字

联系我们

电话:010-69908008
新浪微博@大上科技
官网:www.dasung.com
邮箱:hello@dasung.com



微信服务号

*本说明书最终解释权归北京大上科技有限公司所有。

DASUNG

25.3-inch Paperlike (Revolutionary) Series E-ink Monitor User Guide


(For Mac)

V1.0

This manual applies to Paperlike 253 (Dark Knight Version)
Paperlike Color (Dark Knight Version)

Interface & Physical Button Function

The Paperlike (Revolutionary) 25.3-inch E-ink Monitor comes with a built-in new-generation God-Level High Refresh Rate, available in both black-and-white and color series.

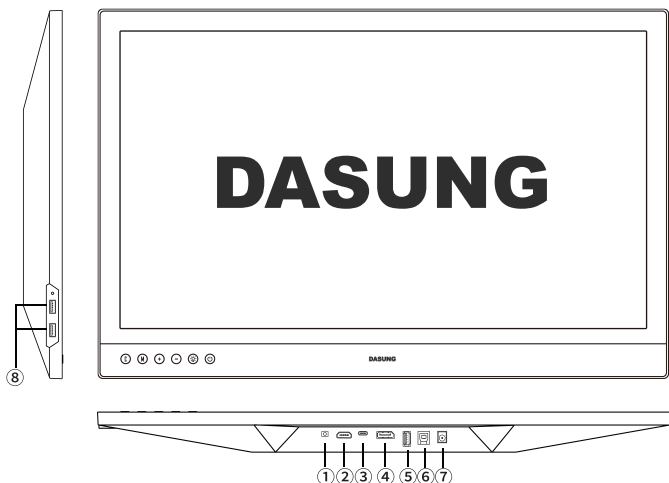

Interface & Button Introduction:

- ① Earphone Jack: This 3.5mm jack is designed for connecting earphones. When the monitor is connected to a PC or laptop and configured as an audio output device, this interface plays computer audio.
- ② Standard HDMI: It utilizes an HDMI-A interface, allowing the connection of the monitor to a PC or laptop via an HDMI-A interface cable.
- ③ Type-C: This features a USB Type-C interface, enabling connection between the monitor and a PC or laptop using a USB Type-C interface cable.
Note: Both a PC or laptop and a compatible cable are necessary for video transmission capability.
- ④ Standard DP: It incorporates a DisplayPort interface, permitting connection between the monitor and a PC or laptop via a cable featuring a DisplayPort interface.

Interface & Physical Button Function

⑤ ⑧ USB-A (Output) Interface


⑥ USB-B (Input) Interface


Note: USB-B (Input) and 3*USB-A (Output): These interfaces collectively function as a USB-HUB. Connecting Paperlike (Revolutionary) to a PC or laptop using the provided USB-B cable enables the 3*USB-A interfaces to be used as USB expansion ports for your PC or laptop.


⑦ Power: Connect to the power cord of your PC or laptop.


Button Introduction:


The respective functions are described as follows:


 : Short press clears ghosting. Press and hold for more than 5 seconds to retain the current customized image quality settings.


 : Used to toggle through image modes in sequence.

 : Turn on and adjust the color temperature of the front light, and switch between "mixed light - cold light - warm light - turn off the front light" status with just one click. (Note: The color temperature adjustment of mixed light requires the use of client software. When using the software, please connect the monitor to your computer using the included USB-B data cable. Software download link: www.dasung.com.)

 : Power Button

 : Increase the contrast


 : Decrease the contrast

 +  /  : Brightness Adjustment

 +  : Restart the Display

Specification

Screen Type	E-ink Screen (B&W / Color)
Display Scale	25.3 inch (16:9 ratio)
Resolution	3200×1800
Panel Coating	Anti-glare Hard Coating 3H
Refresh Rate	DASUNG God-Level High Refresh
Color E-ink Algorithm	DASUNG X-Color Filiter Algorithm
Auto-Clear	DASUNG Auto-Clear Ghosting Removal Tech
Front-light	Mixed-Cold-Warm Light
Video Interface	HDMI 1.4 DisplayPort 1.2 USB Type-C (DisplayPort Alternate Mode on USB Type)
Power Supply	Operating Voltage Range: 5~20V Input power: above 12W Interface model: DC-005 * Consumers should use power adapters that have obtained CCC certification and meet standard requirements
Temperature	Optimum Temperature: 15°C~35°C Operating Temperature: 0°C~50°C Storage Temperature: -25°C~70°C
Fittings	Manual 1.5m USB-A to USB-B cable 1.5m USB-A to USB-B cable
Size	606mm×390mm×13mm(Revo Series)

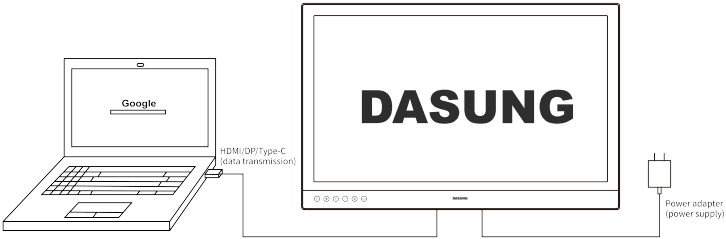

Important Notice: In order to better protect your monitor screen, please press the monitor's power button to “⏻” turn it off before unplugging the power adapter when shutting down the monitor.

Connection Guide:

- ① Run Paperlike Client: Connect the computer to DASUNG monitor using the provided USB-A to USB-B cable. Download, install, and run the Paperlike client software.
- ② Power Supply: Connect the monitor to an AC outlet using the compatible power adapter. The monitor will power on automatically and detect signals.
- ③ Video Cable Connection: Use HDMI, DisplayPort, or USB Type-C to connect the monitor to your computer or smartphone.
Note: If multiple video signals are connected, HDMI takes priority.
- ④ Adjust Image Settings: Use the monitor buttons to switch between display modes and adjust contrast.

Detailed Function Description

Image Mode:

Adjustment Guide: **(M)** Button. Press the button to switch between display modes. Each mode optimizes image algorithms and sets a default contrast for different scenarios, while allowing manual contrast adjustment.

Contrast:

Paperlike (Revolutionary) offers 9 levels of built-in contrast. Higher levels are suitable for text viewing, while lower levels are preferable for viewing images.
Adjustment Method: **(+)** / **(-)** Button

Frent-Light:

The Paperlike (Revolutionary) 25.3-inch E-ink Monitor features a carefully developed large-size front light. Soft uniform high-quality cold light, warm light, mixed light can be freely switched. Brightness is adjustable, and it can be completely closed. Suitable for use day and night.

Video Channel Selection and Switching Function

The Paperlike (Revolutionary) 25.3-inch E-ink Monitor is equipped with three video inputs: HDMI, Type-C, and DP. It supports the simultaneous connection of multiple video signals, and you can manually or automatically select between them.

Automatic Switching: When multiple video signals are connected simultaneously, they are automatically prioritized in the following order: HDMI > Type-C > DP.

Manual Switching: Press the  +  button to manually switch between the video inputs.

Detailed Function Description

USB 3.0 Extended Function:

Connect Paperlike (Revolutionary) to your PC or laptop using the provided USB-A to USB-B 3.0 cable. The three USB-A ports on Paperlike (Revolutionary) will then function as extended USB 3.0 ports for your PC or laptop.

Audio Function:

When your PC or laptop is connected to Paperlike (Revolutionary), audio can be played through the 3.5mm headphone jack. Note that upon initial connection, the Win10 system may automatically switch the "play device" to Paperlike (Revolutionary), muting sound on your PC or laptop speakers. You can adjust this by selecting the playback device in the system's audio settings.

Contact Info

Tel: +8610-69908008

Web: www.dasung.com

Email: contact@dasung.com

Facebook: [@dasungtech](https://www.facebook.com/dasungtech)

Twitter: [@dasungtech](https://twitter.com/dasungtech)

The rights of the final interpretation of this manual belong to Beijing
DASUNG Tech Co., Ltd.

DASUNG