

CCC 认证 CE 认证产品 POHS 环保认证

工业用插头 Industrial plug

 HF-1014 HF-1024	<p>输入 1plug 16A.32A Input: 380V 3P+E</p> <p>输出 3 Connector Output: 380V~ 3P+E</p> <p>防护等级 Protection degree: IP44</p> <p>颜色 Color: Red</p>	 HF-1015 HF-1025	<p>电流 Nominal current(A): 16A.32A</p> <p>输入 Input: 1Plug 200V 3P+N+E</p> <p>输出 Output: 3 Connector 220V 2P+E</p> <p>防护等级 Protection degree: IP67</p>
 HFY-1012 HFY-1023	<p>输入 1plug 16A.32A Input: 220V 2P+E</p> <p>输出 2 Connector Output: 220V 2P+E</p> <p>防护等级 Protection degree: IP44</p> <p>颜色 Color: Blue</p>	 HFY-1014 HFY-1024	<p>输入 1plug 16A.32A Input: 380V 3P+E</p> <p>输出 2 Connector Output: 380V 3P+E</p> <p>防护等级 Protection degree: IP44</p> <p>颜色 Color: Red</p>
 HFY-1015 HFY-1025	<p>电流 Nominal current(A): 16A.32A</p> <p>输入 Input: 1Plug 200V 3P+N+E</p> <p>输出 Output: 2 Connector 220V 2P+E</p> <p>防护等级 Protection degree: IP67</p>		



乐清市禾丰电气有限公司

地址：乐清市温州大桥工业区

电话：0577-2777 3399


手机：188 5877 5252

网址：[HTTP:WWW.SUOKAI.CC](http://WWW.SUOKAI.CC)

QQ: 87793806

本手册供产品选型参考，产品图片及安装尺寸以实物为准，
如有改动不作另行通知，不承担任何法律责任。



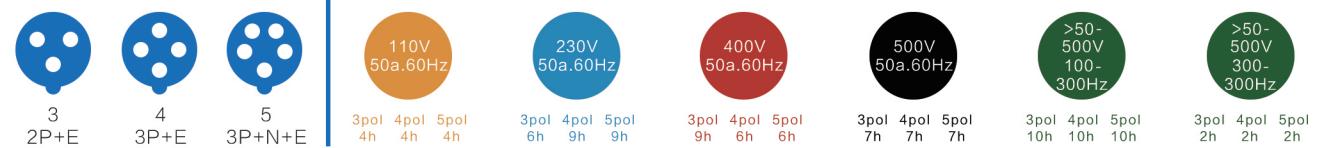


CCC 认证 CE 认证产品 POHS 环保认证

工业用插头 Industrial plug



电流 Current (A) : 16A.32A
电压 Voltage(V) : 110-130V~2P+E
防护等级 Protection degree: IP67



earth contact position		4h	
rated current(A)	16	32	
pole	3		
dimension(mm)	a b c φ	122 59 51 6	139 75 64 8
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



电流 Current (A) : 16A.32A
电压 Voltage(V) : 380-415V~3P+E
防护等级 Protection degree: IP44



earth contact position		6h	
rated current(A)	16	32	
pole	4		
dimension(mm)	a b c φ	141 59 51 8	178 75 64 10
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



电流 Current (A) : 16A.32A
电压 Voltage(V) : 110-130V~2P+E
防护等级 Protection degree: IP44



earth contact position		6h	
rated current(A)	16	32	
pole	3		
dimension(mm)	a b c φ	141 59 51 8	178 75 64 10
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



电流 Current (A) : 16A.32A
电压 Voltage(V) : 220-380V~3P+N+E
防护等级 Protection degree: IP44



earth contact position		6h	
rated current(A)	16	32	
pole	4		
dimension(mm)	a b c φ	130 72 64 8	143 84 70 8
cable nominal cross-section area(mm²)	1-2.5	2.5-6	




电流 Current (A) : 16A.32A
电压 Voltage(V) : 220-250V~2P+E
防护等级 Protection degree: IP44



earth contact position		6h	
rated current(A)	16	32	
pole	3		
dimension(mm)	a b c φ	122 59 51 6	139 75 64 8
cable nominal cross-section area(mm²)	1-2.5	2.5-6	




电流 Current (A) : 16A.32A
电压 Voltage(V) : 220-380V~3P+N+E
防护等级 Protection degree: IP44



earth contact position		6h	
rated current(A)	16	32	
pole	5		
dimension(mm)	a b c φ	169 72 64 10	181 84 70 10
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



电流 Current (A) : 16A.32A
电压 Voltage(V) : 220-250V~2P+E
防护等级 Protection degree: IP44

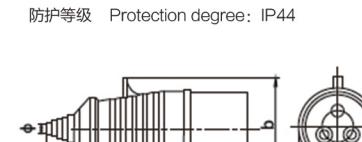

earth contact position		6h	
rated current(A)	16	32	
pole	3		
dimension(mm)	a b c φ	122 59 51 6	139 75 64 8
cable nominal cross-section area(mm²)	1-2.5	2.5-6	




电流 Current (A) : 63A.125A
电压 Voltage(V) : 220-240V~2P+E
防护等级 Protection degree: IP67



earth contact position		6h	
rated current(A)	63	125	
pole	3		
dimension(mm)	a b c d φ	231.5 110 16-38 110	293 125 30-50 125
cable nominal cross-section area(mm²)	6-16	16-50	



电流 Current (A) : 16A.32A
电压 Voltage(V) : 380-415V~3P+E
防护等级 Protection degree: IP44

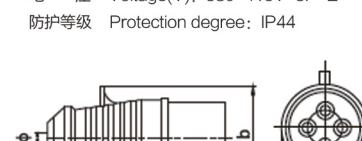


earth contact position		6h	
rated current(A)	16	32	
pole	4		
dimension(mm)	a b c φ	122 65 55 6	139 75 65 8
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



电流 Current (A) : 63A.125A
电压 Voltage(V) : 380-415V~3P+E
防护等级 Protection degree: IP67



earth contact position		6h	
rated current(A)	63	125	
pole	4		
dimension(mm)	a b c d φ	231.5 110 16-38 110	293 125 30-50 125
cable nominal cross-section area(mm²)	6-16	16-50	

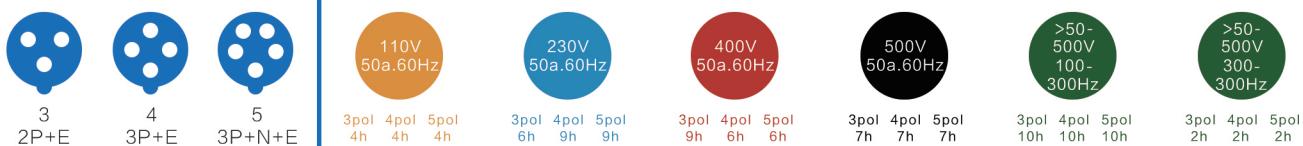


CCC 认证 CE 认证产品 POHS 环保认证

工业用插头 Industrial plug



电流 Current (A) : 63A.125A
电压 Voltage(V) : 220-380V~ 240-415V~ 3P+N+E
防护等级 Protection degree: IP67

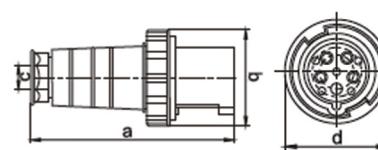

HF-035

HF-045

earth contact position		6h		
rated current(A)	63	125		
pole	5			
dimension(mm)	a b c d e f g h	231.5 110 16-38 110 293 102 30-50 125		
cable nominal cross-section area(mm²)	6-16	1-50		




电流 Current (A) : 63A.125A
电压 Voltage(V) : 220-240V~2P+E
防护等级 Protection degree: IP67




HF-133

HF-143

earth contact position		6h		
rated current(A)	63	125		
pole	3			
dimension(mm)	a b c d e f g h	134 311 338 108 122 111 20 6		
cable nominal cross-section area(mm²)	6-25	25-70		



电流 Current (A) : 16A.32A
电压 Voltage(V) : 110-130V~2P+E
防护等级 Protection degree: IP67




HF-113-4

HF-123-4

earth contact position		6h		
rated current(A)	63	125		
pole	5			
dimension(mm)	a b c d e f g h	135 62 71 50 57 20 32.5 6.5		
cable nominal cross-section area(mm²)	1-2.5	2.5-6		



电流 Current (A) : 63A.125A
电压 Voltage(V) : 380-415V~3P+E
防护等级 Protection degree: IP67




HF-134

HF-144

earth contact position		6h		
rated current(A)	63	125		
pole	4			
dimension(mm)	a b c d e f g h	134 311 338 108 122 111 20 6		
cable nominal cross-section area(mm²)	6-25	25-70		



电流 Current (A) : 16A.32A
电压 Voltage(V) : 220-250V~2P+E
防护等级 Protection degree: IP44




HF-113

HF-123

earth contact position		6h		
rated current(A)	16	32		
pole	3			
dimension(mm)	a b c d e f g h	135 92 71 50 57 20 32.5 6.5		
cable nominal cross-section area(mm²)	1-2.5	2.5-6		



电流 Current (A) : 63A.125A
电压 Voltage(V) : 220-380V~ 3P+N+E
防护等级 Protection degree: IP67




HF-135

HF-145

earth contact position		6h		
rated current(A)	63	125		
pole	5			
dimension(mm)	a b c d e f g h	134 311 338 108 122 111 20 6		
cable nominal cross-section area(mm²)	6-25	25-70		



电流 Current (A) : 16A.32A
电压 Voltage(V) : 380-415V~3P+E
防护等级 Protection degree: IP44




HF-114

HF-124

earth contact position		6h		
rated current(A)	16	32		
pole	4			
dimension(mm)	a b c d e f g h	140 95 71 56 57 20 32.5 6.5		
cable nominal cross-section area(mm²)	1-2.5	2.5-6		



电流 Current (A) : 16A.32A
电压 Voltage(V) : 110-130V~2P+E
防护等级 Protection degree: IP44



HF-213L-4

HF-223L-4

earth contact position		3h		
rated current(A)	16	32		
pole	3			
dimension(mm)	a b c d e f g h	150 68 50 8		
cable nominal cross-section area(mm²)	1-2.5	2.5-6		



电流 Current (A) : 16A.32A
电压 Voltage(V) : 220-380V~ 3P+N+E
防护等级 Protection degree: IP44




HF-115

HF-125

earth contact position		6h		
rated current(A)	16	32		
pole	5			
dimension(mm)	a b c d e f g h	139 100 71 63 57 20 32.5 6.5		
cable nominal cross-section area(mm²)	1-2.5	2.5-6		




电流 Current (A) : 16A.32A
电压 Voltage(V) : 220-250V~2P+E
防护等级 Protection degree: IP44



HF-213

HF-223

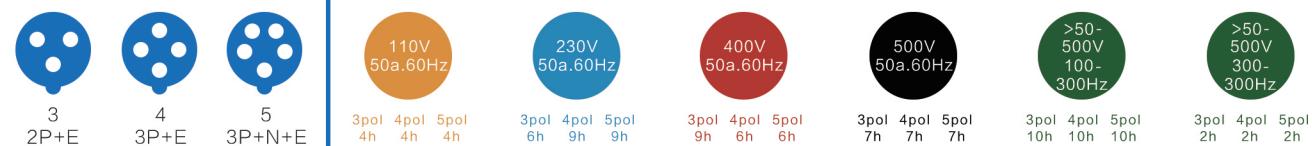


CCC 认证 CE 认证产品 POHS 环保认证

工业用插头 Industrial plug



电流 Current (A) : 16A.32A
电压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44

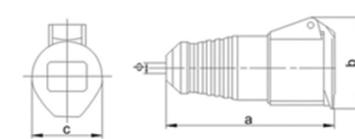


earth contact position		6h	
rated current(A)	16	32	
pole	4		
dimension(mm)	a b c φ	131 79 56 6	150 92 65 8
cable nominal cross-section area(mm²)	1-2.5	2.5-6	

HF-214

HF-224



电流 Current (A) : 16A.32A
电压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP44

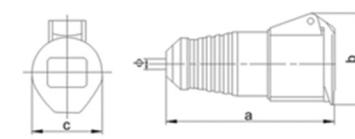


earth contact position		6h	
rated current(A)	63	125	
pole	5		
dimension(mm)	a b c φ	139 90 63 8	154 100 70.5 8
cable nominal cross-section area(mm²)	1-2.5	2.5-6	

HF-215

HF-225



电流 Current (A) : 63A.125A
电压 Voltage(V): 220-250V~2P+E
防护等级 Protection degree: IP67

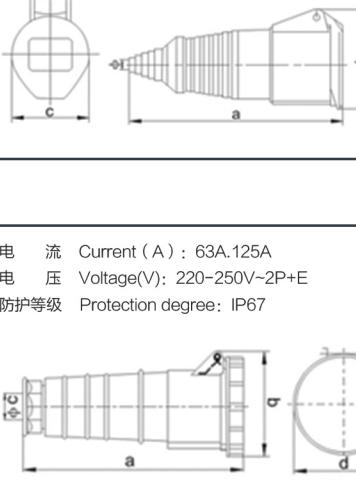

earth contact position		6h	
rated current(A)	16	32	
pole	5		
dimension(mm)	a b c d	179 90 63 10	193 100 70.5 10
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



电流 Current (A) : 16A.32A
电压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44




earth contact position		3h	
rated current(A)	16	32	
pole	3		
dimension(mm)	a b c φ	150 68 50 8	189 92 65 10
cable nominal cross-section area(mm²)	1-2.5	2.5-6	

HF-213L-4

HF-223L-4




电流 Current (A) : 63A.125A
电压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67

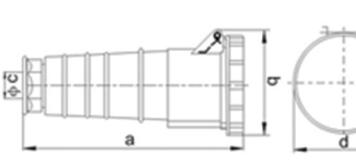

earth contact position		6h	
rated current(A)	63	125	
pole	4		
dimension(mm)	a b c d	204 115 16-38 108	303 128 30-50 120
cable nominal cross-section area(mm²)	6-16	16-50	




电流 Current (A) : 63A.125A
电压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP67

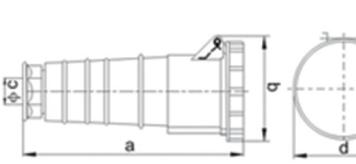

earth contact position		6h	
rated current(A)	63	125	
pole	5		
dimension(mm)	a b c d	240 115 16-38 108	303 128 30-50 120
cable nominal cross-section area(mm²)	6-16	16-50	



电流 Current (A) : 16A.32A
电压 Voltage(V): 220-250V~2P+E
防护等级 Protection degree: IP44

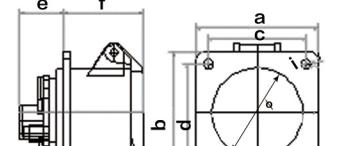


earth contact position		6h	
rated current(A)	16	32	
pole	3		
dimension(mm)	a b c d e f	70 70 56 56 27 47	70 70 56 56 63 53
cable nominal cross-section area(mm²)	1-2.5	2.5-6	5.5


HF-214L

HF-224L

earth contact position		6h	
rated current(A)	16	32	
pole	4		
dimension(mm)	a b c φ	149 79 56 8	189 92 65 10
cable nominal cross-section area(mm²)	1-2.5	2.5-6	

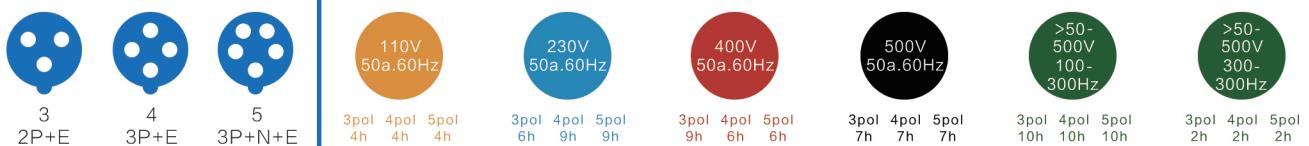**CCC 认证 CE 认证产品 POHS 环保认证****工业用插头 Industrial plug**

电流 Current (A) : 16A.32A
电压 Voltage(V) : 380~415V~3P+E
防护等级 Protection degree: IP44

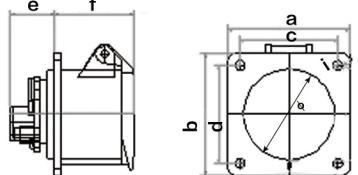


HF-314

HF-324

earth contact position	6h	
rated current(A)	16	32
pole	4	
dimension(mm)	a	70
	b	70
	c	56
	d	56
	e	24
	f	51
	ø	46
	i	57
cable nominal cross-section area(mm²)	1-2.5	2.5-6



电流 Current (A) : 16A.32A
电压 Voltage(V) : 220~250V~2P+E
防护等级 Protection degree: IP44

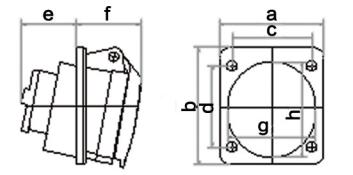


HF-413

HF-423

earth contact position	6h	
rated current(A)	16	32
pole	3	
dimension(mm)	a	62
	b	69
	c	47
	d	48
	e	35
	f	40
	g	52
	h	58
	i	5.5
cable nominal cross-section area(mm²)	1-2.5	2.5-6



电流 Current (A) : 16A.32A
电压 Voltage(V) : 220~380V~240~415V~3P+N+E
防护等级 Protection degree: IP44

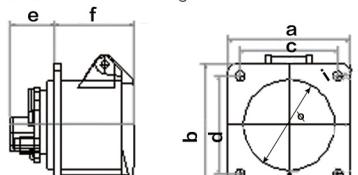


HF-315

HF-325

earth contact position	6h	
rated current(A)	16	32
pole	5	
dimension(mm)	a	70
	b	70
	c	56
	d	56
	e	27
	f	50
	g	59
	ø	58
	i	5.5
cable nominal cross-section area(mm²)	1-2.5	2.5-6



电流 Current (A) : 16A.32A
电压 Voltage(V) : 380~415V~3P+E
防护等级 Protection degree: IP44

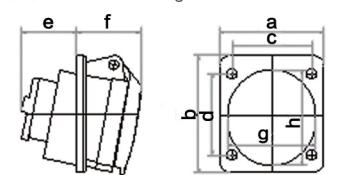


HF-414

HF-424

earth contact position	6h	
rated current(A)	16	32
pole	4	
dimension(mm)	a	76
	b	86
	c	60
	d	62
	e	40
	f	36
	g	58
	h	64
	i	73
cable nominal cross-section area(mm²)	1-2.5	2.5-6



电流 Current (A) : 63A.125A
电压 Voltage(V) : 220~250V~2P+E
防护等级 Protection degree: IP67

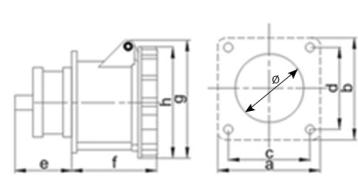


HF-333

HF-343

earth contact position	6h	
rated current(A)	63	125
pole	3	
dimension(mm)	a	100
	b	100
	c	82
	d	101
	e	82
	f	101
	g	54.5
	h	68
	i	88
	ø	114
	j	129
	k	108
	l	122
	m	88
cable nominal cross-section area(mm²)	6-25	25-70



电流 Current (A) : 16A.32A
电压 Voltage(V) : 220~380V~240~415V~3P+N+E
防护等级 Protection degree: IP44

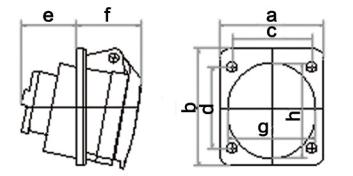


HF-415

HF-425

earth contact position	6h	
rated current(A)	16	32
pole	5	
dimension(mm)	a	76
	b	86
	c	60
	d	62
	e	40
	f	36
	g	58
	h	64
	i	73
cable nominal cross-section area(mm²)	1-2.5	2.5-6




电流 Current (A) : 63A.125A
电压 Voltage(V) : 380~415V~3P+E
防护等级 Protection degree: IP67

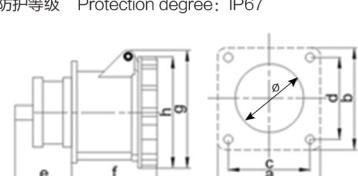


HF-334

HF-344

earth contact position	6h	
rated current(A)	63	125
pole	4	
dimension(mm)	a	100
	b	100
	c	82
	d	101
	e	82
	f	101
	g	54.5
	h	68
	i	88
	ø	114
	j	129
	k	108
	l	122
	m	88
cable nominal cross-section area(mm²)	6-25	25-70



电流 Current (A) : 16A.32A
电压 Voltage(V) : 220~250V~2P+E
防护等级 Protection degree: IP44

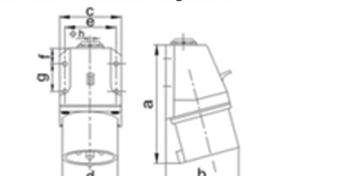


HF-513

HF-523

earth contact position	6h	
rated current(A)	16	32
pole	3	
dimension(mm)	a	134
	b	80
	c	71
	d	43.5
	e	57
	f	20
	g	32.5
	h	6.5
cable nominal cross-section area(mm²)	1-2.5	2.5-6



电流 Current (A) : 63A.125A
电压 Voltage(V) : 220~380V~240~415V~3P+N+E
防护等级 Protection degree: IP67

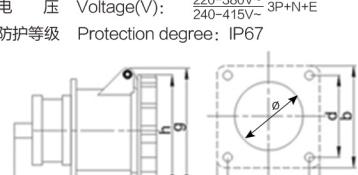


HF-335

工业用插头 Industrial plug



电流 Current (A) : 16A.32A
电压 Voltage(V): 220-380V~ 3P+N+E
防护等级 Protection degree: IP44




HF-515 HF-525

earth contact position		6h	
rated current(A)	pole	16	32
	dimension(mm)	a	138.5
		b	83
		c	90
		d	71
		e	71
		f	55
		g	64
		h	57
			57
			20
			20
			32.5
			33.5
			6.5
			6.5
	cable nominal cross-section area(mm²)	1-2.5	2.5-6

3
2P+E4
3P+E5
3P+N+E3pol
4pol
5pol
4h
6h
9h3pol
4pol
5pol
6h
9h
6h3pol
4pol
5pol
9h
6h
6h3pol
4pol
5pol
7h
7h
7h3pol
4pol
5pol
10h
10h
10h3pol
4pol
5pol
2h
2h
2h


电流 Current (A) : 16A.32A
电压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67

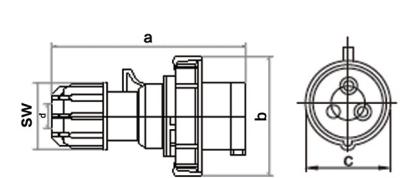

earth contact position		4h	
rated current(A)	pole	16	32
	dimension(mm)	a	118
		b	82
		c	47
		d	6-15
		sw	10-20
			38
			50
	cable nominal cross-section area(mm²)	1-2.5	2.5-6




电流 Current (A) : 16A.32A
电压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44

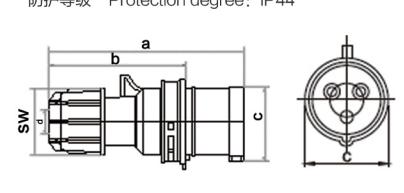

earth contact position		6h	
rated current(A)	pole	16	32
	dimension(mm)	a	118
		b	82
		c	47
		d	6-15
		sw	10-20
			38
			50
	cable nominal cross-section area(mm²)	1-2.5	2.5-6




电流 Current (A) : 16A.32A
电压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67

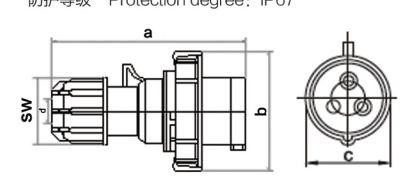

earth contact position		6h	
rated current(A)	pole	16	32
	dimension(mm)	a	118
		b	82
		c	47
		d	6-16
		sw	10-20
			38
			50
	cable nominal cross-section area(mm²)	1-2.5	2.5-6




电流 Current (A) : 16A.32A
电压 Voltage(V): 380-415-3P+E
防护等级 Protection degree: IP44

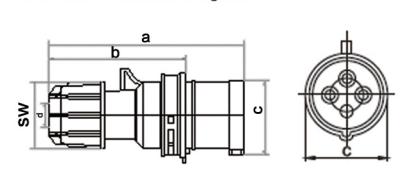

earth contact position		6h	
rated current(A)	pole	16	32
	dimension(mm)	a	124
		b	88
		c	53
		d	6-15
		sw	10-20
			38
			50
	cable nominal cross-section area(mm²)	1-2.5	2.5-6



电流 Current (A) : 16A.32A
电压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67

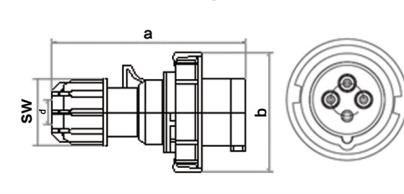


earth contact position		6h	
rated current(A)	pole	16	32
	dimension(mm)	a	124
		b	79
		c	53
		d	6-15
		sw	10-20
			38
			50
	cable nominal cross-section area(mm²)	1-2.5	2.5-6

CCC 认证 CE 认证产品 POHS 环保认证

工业用插头 Industrial plug



电流 Current (A) : 16A.32A
 电压 Voltage(V): 220-330V~
 防护等级 Protection degree: IP44



earth contact position		6h	
rated current(A)	16	32	
pole	5		
dimension(mm)			
a	131	152	
b	95	106	
c	61	70	
d	8-16	10-20	
sw	42	50	
cable nominal cross-section area(mm²)	1-2.5	2.5-6	

3
2P+E4
3P+E5
3P+N+E3pol
4h
4pol
4h
5pol
4h3pol
6h
4pol
9h
5pol
9h3pol
9h
4pol
6h
5pol
6h3pol
7h
4pol
7h
5pol
7h3pol
10h
4pol
10h
5pol
10h3pol
2h
4pol
2h
5pol
2h

CCC 认证 CE 认证产品 POHS 环保认证

HFN-015 HFN-025

电流 Current (A) : 16A.32A
 电压 Voltage(V): 220-330V~
 防护等级 Protection degree: IP44

earth contact position	6h	
rated current(A)	16	32
pole	5	

dimension(mm)	a	131	152
b	95	106	
c	61	70	
d	8-16	10-20	
sw	42	50	

cable nominal cross-section area(mm²)

1-2.5

2.5-6



电流 Current (A) : 16A.32A
 电压 Voltage(V): 220-330V~
 防护等级 Protection degree: IP67

earth contact position	6h	
rated current(A)	16	32
pole	5	

dimension(mm)	a	131	152
b	87	100	
c	8-16	10-20	
sw	42	50	

cable nominal cross-section area(mm²)

1-2.5

2.5-6



电流 Current (A) : 63A.125A
 电压 Voltage(V): 110-130V~
 防护等级 Protection degree: IP67

earth contact position	4h	
rated current(A)	63	125
pole	4	

dimension(mm)	a	240	295
b	115	126	
c	30	44.5	
sw			

cable nominal cross-section area(mm²)

6-16

16-50



电流 Current (A) : 63A.125A
 电压 Voltage(V): 220-250V~
 防护等级 Protection degree: IP67

earth contact position	6h	
rated current(A)	63	125
pole	3	

dimension(mm)	a	240	295
b	115	126	
c	30	44.5	
sw			

cable nominal cross-section area(mm²)

6-16

16-50



电流 Current (A) : 16A.32A
 电压 Voltage(V): 220-380V~
 防护等级 Protection degree: IP67

earth contact position	6h	
rated current(A)	63	125
pole	3	

dimension(mm)	a	240	295
b	115	126	
c	30	44.5	
sw			

cable nominal cross-section area(mm²)

6-16


16-50

	电流 Current (A) : 63A.125A 电压 Voltage(V): 220-330V~ 防护等级 Protection degree: IP67	<table border="1"> <tr> <td>earth contact position</td> <td colspan="2">6h</td> </tr> <tr> <td>rated current(A)</td> <td>63</td> <td>125</td> </tr> <tr> <td>pole</td> <td>5</td> <td></td> </tr> </table>	earth contact position	6h		rated current(A)	63	125	pole	5	
earth contact position	6h										
rated current(A)	63	125									
pole	5										
	电流 Current (A) : 16A.32A 电压 Voltage(V): 110-130V~ 防护等级 Protection degree: IP44	<table border="1"> <tr> <td>earth contact position</td> <td colspan="2">4h</td> </tr> <tr> <td>rated current(A)</td> <td>16</td> <td>32</td> </tr> <tr> <td>pole</td> <td>3</td> <td></td> </tr> </table>	earth contact position	4h		rated current(A)	16	32	pole	3	
earth contact position	4h										
rated current(A)	16	32									
pole	3										
	电流 Current (A) : 16A.32A 电压 Voltage(V): 110-130V~ 防护等级 Protection degree: IP67	<table border="1"> <tr> <td>earth contact position</td> <td colspan="2">4h</td> </tr> <tr> <td>rated current(A)</td> <td>16</td> <td>32</td> </tr> <tr> <td>pole</td> <td>3</td> <td></td> </tr> </table>	earth contact position	4h		rated current(A)	16	32	pole	3	
earth contact position	4h										
rated current(A)	16	32									
pole	3										
	电流 Current (A) : 16A.32A 电压 Voltage(V): 220-250V~ 防护等级 Protection degree: IP44	<table border="1"> <tr> <td>earth contact position</td> <td colspan="2">6h</td> </tr> <tr> <td>rated current(A)</td> <td>16</td> <td>32</td> </tr> <tr> <td>pole</td> <td>3</td> <td></td> </tr> </table>	earth contact position	6h		rated current(A)	16	32	pole	3	
earth contact position	6h										
rated current(A)	16	32									
pole	3										
	电流 Current (A) : 16A.32A 电压 Voltage(V): 220-250V~ 防护等级 Protection degree: IP67	<table border="1"> <tr> <td>earth contact position</td> <td colspan="2">6h</td> </tr> <tr> <td>rated current(A)</td> <td>16</td> <td>32</td> </tr> <tr> <td>pole</td> <td>3</td> <td></td> </tr> </table>	earth contact position	6h		rated current(A)	16	32	pole	3	
earth contact position	6h										
rated current(A)	16	32									
pole	3										

工业用插头 Industrial plug




电流 Current (A) : 16A.32A
电压 Voltage(V) : 380~415V~3P+E
防护等级 Protection degree: IP44



earth contact position		6h	
rated current(A)	16	32	
pole	4		
dimension(mm)	a b	155 96	165 107
cable nominal cross-section area(mm ²)	1~2.5	2.5~6	




电流 Current (A) : 16A.32A
电压 Voltage(V) : 380~415V~3P+E
防护等级 Protection degree: IP67



earth contact position		6h	
rated current(A)	16	32	
pole	4		
dimension(mm)	a b	155 96	165 107
cable nominal cross-section area(mm ²)	1~2.5	2.5~6	




电流 Current (A) : 16A.32A
电压 Voltage(V) : 380~415V~3P+N+E
防护等级 Protection degree: IP44



earth contact position		6h	
rated current(A)	16	32	
pole	5		
dimension(mm)	a b	153 103	163 109
cable nominal cross-section area(mm ²)	1~2.5	2.5~6	




电流 Current (A) : 16A.32A
电压 Voltage(V) : 380~415V~3P+N+E
防护等级 Protection degree: IP67





earth contact position		6h	
rated current(A)	16	32	
pole	5		
dimension(mm)	a b	153 103	163 109
cable nominal cross-section area(mm ²)	1~2.5	2.5~6	




电流 Current (A) : 62A.125A
电压 Voltage(V) : 220~250V~2P+E
防护等级 Protection degree: IP67




earth contact position		6h	
rated current(A)	63	125	
pole	5		
dimension(mm)	a b c d e f	171 170 250 118 137 104	220 220 285 140 137 130
cable nominal cross-section area(mm ²)	6~16	16~50	

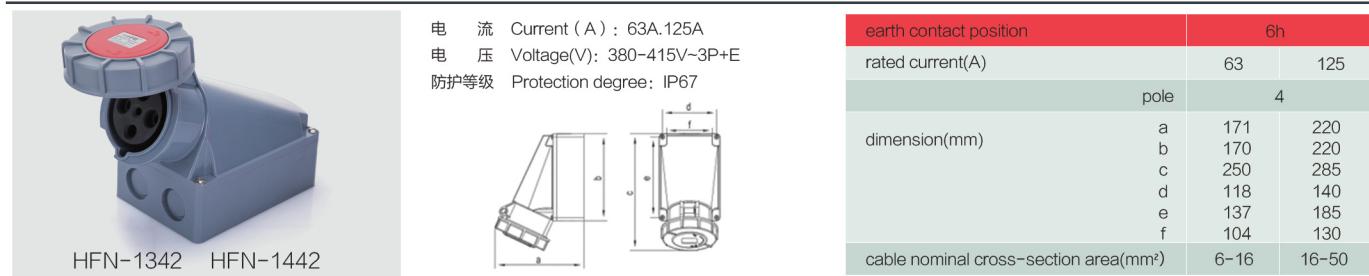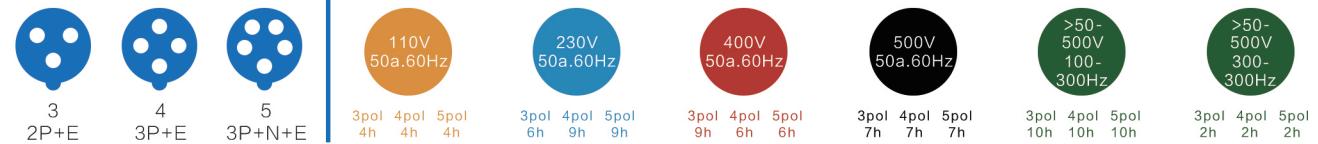


电流 Current (A) : 63A.125A
电压 Voltage(V) : 380~415V~3P+E
防护等级 Protection degree: IP67




earth contact position		6h	
rated current(A)	63	125	
pole	4		
dimension(mm)	a b c d e f	171 170 250 118 137 104	220 220 285 140 137 130
cable nominal cross-section area(mm ²)	6~16	16~50	

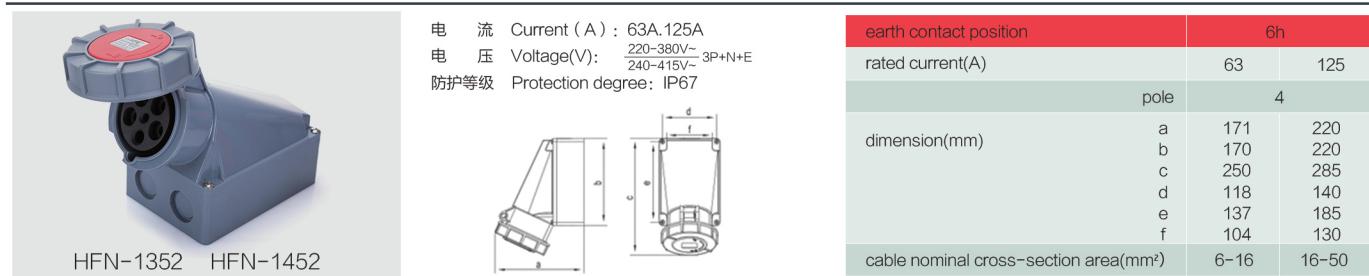


电流 Current (A) : 63A.125A
电压 Voltage(V) : 220~380V~3P+N+E
防护等级 Protection degree: IP67




earth contact position		6h	
rated current(A)	63	125	
pole	4		
dimension(mm)	a b c d e f	171 170 250 118 137 104	220 220 285 140 137 130
cable nominal cross-section area(mm ²)	6~16	16~50	

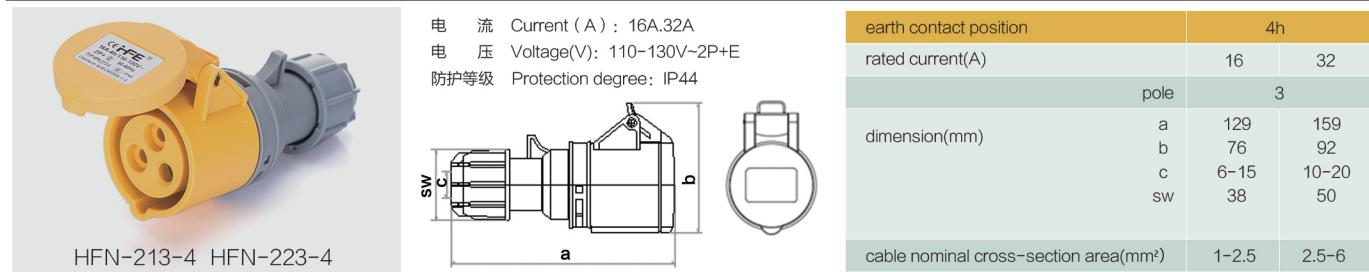


电流 Current (A) : 16A.32A
电压 Voltage(V) : 110~130V~2P+E
防护等级 Protection degree: IP44




earth contact position		4h	
rated current(A)	16	32	
pole	3		
dimension(mm)	a b c sw	129 76 6~15 38	159 92 10~20 50
cable nominal cross-section area(mm ²)	1~2.5	2.5~6	

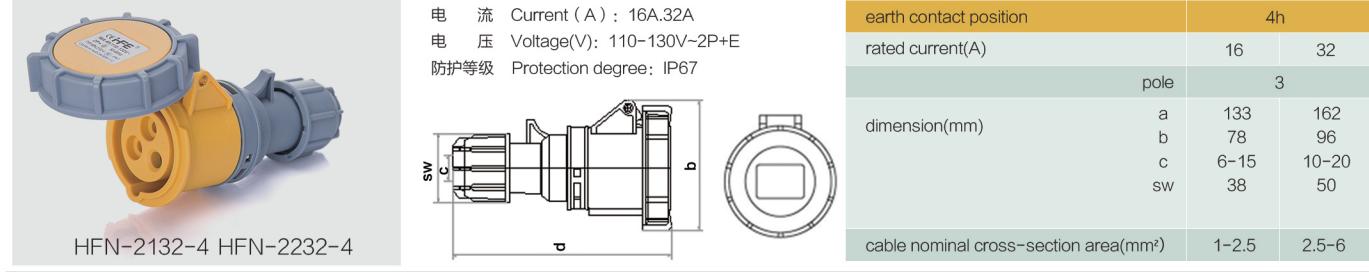


电流 Current (A) : 16A.32A
电压 Voltage(V) : 110~130V~2P+E
防护等级 Protection degree: IP67



earth contact position		4h	
rated current(A)	16	32	
pole	3		
dimension(mm)	a b c sw	133 78 6~15 38	162 96 10~20 50
cable nominal cross-section area(mm ²)	1~2.5	2.5~6	

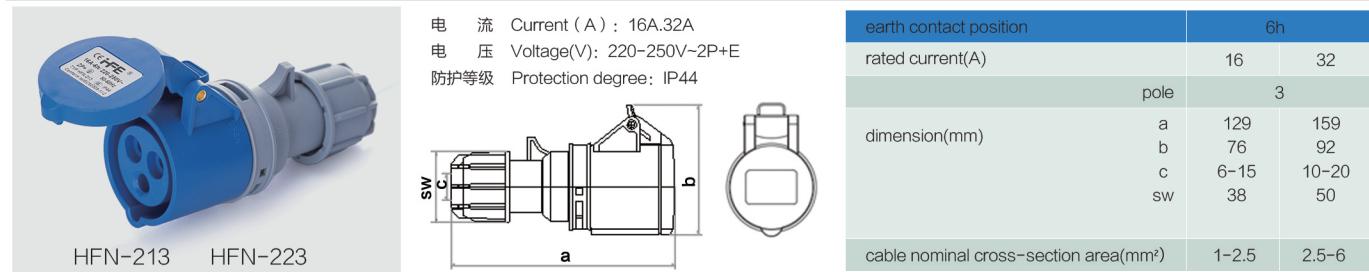

电流 Current (A) : 16A.32A
电压 Voltage(V) : 220~250V~2P+E
防护等级 Protection degree: IP44



earth contact position		6h	
rated current(A)	16	32	
pole	3		
dimension(mm)</td			

工业用插头 Industrial plug




电 流 Current (A) : 16A.32A
电 压 Voltage(V): 220-250V~2P+E
防护等级 Protection degree: IP67

HFN-2132

earth contact position	6h	
rated current(A)	16	32
pole	3	
dimension(mm)		
a	133	162
b	78	96
c	6-15	10-20
sw	38	50
cable nominal cross-section area(mm²)	1-2.5	2.5-6

HFN-2232




电 流 Current (A) : 16A.32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44

HFN-214

earth contact position	6h	
rated current(A)	16	32
pole	4	
dimension(mm)		
a	135	159
b	80	92
c	6-16	10-20
sw	38	50
cable nominal cross-section area(mm²)	1-2.5	2.5-6

HFN-224




电 流 Current (A) : 16A.32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP67

HFN-2142

earth contact position	6h	
rated current(A)	16	32
pole	4	
dimension(mm)		
a	135	159
b	80	92
c	6-15	10-20
sw	38	50
cable nominal cross-section area(mm²)	1-2.5	2.5-6

HFN-2242




电 流 Current (A) : 16A.32A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP44

HFN-215

earth contact position	6h	
rated current(A)	16	32
pole	5	
dimension(mm)		
a	145	163
b	92	102
c	8-16	12-22
sw	42	50
cable nominal cross-section area(mm²)	1-2.5	2.5-6

HFN-225



电 流 Current (A) : 16A.32A
电 压 Voltage(V): 220-380V~3P+N+E
防护等级 Protection degree: IP67

HFN-2152

earth contact position	6h	
rated current(A)	16	32
pole	5	
dimension(mm)		
a	145	168
b	92	102
c	8-16	12-22
sw	42	50
cable nominal cross-section area(mm²)	1-2.5	2.5-6

HFN-2252



3

2P+E



4

3P+E



5

3P+N+E



110V

50a.60Hz



230V

50a.60Hz



400V

50a.60Hz



500V

50a.60Hz



>50-

500V

100-300Hz



>50-

500V

300-300Hz



电 流 Current (A) : 63A.125A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67

HFN-2332-4

earth contact position	4h	
rated current(A)	63	125
pole	4	
dimension(mm)		
a	261	305
b	114	115
c	30	44.5
d	112	130
cable nominal cross-section area(mm²)	6-16	16-50

电 流 Current (A) : 63A.125A
电 压 Voltage(V): 220-250V~2P+E
防护等级 Protection degree: IP67


HFN-2432-4

earth contact position	6h	
rated current(A)	63	125
pole	3	
dimension(mm)		
a	261	305
b	114	115
c	30	44.5
d	112	130
cable nominal cross-section area(mm²)	6-16	16-50

电 流 Current (A) : 63A.125A
电 压 Voltage(V): 220-250V~2P+E
防护等级 Protection degree: IP67

HFN-2432

earth contact position

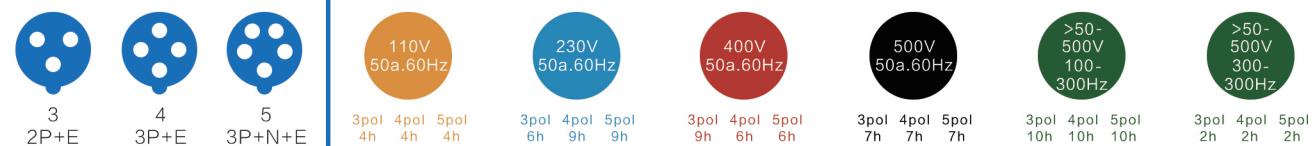

CCC 认证 CE 认证产品 POHS 环保认证

工业用插头 Industrial plug



电 流 Current (A) : 16A.32A
电 压 Voltage(V): 220-380V~ 240-415V~
防护等级 Protection degree: IP67

earth contact position	6h	
rated current(A)	16	32
pole	5	
dimension(mm)		
a	145	168
b	92	102
c	8-16	12-22
sw	42	50
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



电 流 Current (A) : 16A.32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67

earth contact position	4h	
rated current(A)	16	32
pole	3	
dimension(mm)		
axb	76	76
cx d	61	61
e	16	20
f	61	74
g	5.5	5.5
h	46	60
i	80	98
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



电 流 Current (A) : 63A.125A
电 压 Voltage(V): 220-250V~2P+E
防护等级 Protection degree: IP67

earth contact position	6h	
rated current(A)	63	125
pole	3	
dimension(mm)		
a	261	305
b	114	115
c	30	44.5
d	112	130
cable nominal cross-section area(mm ²)	6-16	16-50



电 流 Current (A) : 16A.32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44

earth contact position	6h	
rated current(A)	16	32
pole	3	
dimension(mm)		
axb	76	76
cx d	61	61
e	16	20
f	61	74
g	5.5	5.5
h	46	60
i	85	95
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



电 流 Current (A) : 63A.125A
电 压 Voltage(V): 380-415V~2P+E
防护等级 Protection degree: IP67

earth contact position	6h	
rated current(A)	63	125
pole	4	
dimension(mm)		
a	261	305
b	114	115
c	30	44.5
d	112	130
cable nominal cross-section area(mm ²)	6-16	16-50



电 流 Current (A) : 16A.32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67

earth contact position	6h	
rated current(A)	16	32
pole	3	
dimension(mm)		
axb	76	76
cx d	61	61
e	16	20
f	61	74
g	5.5	5.5
h	46	60
i	80	98
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



电 流 Current (A) : 63A.125A
电 压 Voltage(V): 220-380V~ 240-415V~
防护等级 Protection degree: IP67

earth contact position	6h	
rated current(A)	63	125
pole	5	
dimension(mm)		
a	261	305
b	114	115
c	30	44.5
d	112	130
cable nominal cross-section area(mm ²)	6-16	16-50



电 流 Current (A) : 16A.32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44

earth contact position	6h	
rated current(A)	16	32
pole	4	
dimension(mm)		
axb	76	76
cx d	61	61
e	16	20
f	60	70
g	5.5	5.5
h	53	61
i	85	95
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



电 流 Current (A) : 16A.32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44


earth contact position	4h
------------------------	----

工业用插头 Industrial plug



HFN-3152 HFN-3252

电流 Current (A) : 16A.32A
 电压 Voltage(V): 220~380V~ 3P+N+E
 防护等级 Protection degree: IP44




earth contact position		6h	
rated current(A)		16	32
pole		5	
dimension(mm)		a	76
		b	61
		c	18
		d	58
		e	5.5
		f	60
		g	60
		h	91
		i	98
cable nominal cross-section area(mm ²)		1~2.5	2.5~6



HFN-3152 HFN-3252

电流 Current (A) : 16A.32A
 电压 Voltage(V): 220~380V~ 3P+N+E
 防护等级 Protection degree: IP67




earth contact position		6h	
rated current(A)		16	32
pole		5	
dimension(mm)		a	76
		b	61
		c	17
		d	62
		e	5.5
		f	60
		g	60
		h	91
cable nominal cross-section area(mm ²)		1~2.5	2.5~6



HFN-3332 HFN-3432

电流 Current (A) : 63A.125A
 电压 Voltage(V): 220~250V~2P+E
 防护等级 Protection degree: IP67




earth contact position		6h	
rated current(A)		63	125
pole		3	
dimension(mm)		a	100
		b	120
		c	80
		d	100
		e	39
		f	94.5
		g	104
		h	114
cable nominal cross-section area(mm ²)		6~16	16~50



HFN-3342 HFN-3442

电流 Current (A) : 63A.125A
 电压 Voltage(V): 380~415V~3P+N+E
 防护等级 Protection degree: IP67




earth contact position		6h	
rated current(A)		63	125
pole		5	
dimension(mm)		a	100
		b	120
		c	80
		d	100
		e	39
		f	94.5
		g	104
		h	114
cable nominal cross-section area(mm ²)		6~16	16~50



HFN-3352 HFN-3452

电流 Current (A) : 16A.32A
 电压 Voltage(V): 220~380V~ 3P+N+E
 防护等级 Protection degree: IP67



earth contact position		6h	
rated current(A)		63	125
pole		5	
dimension(mm)		a	100
		b	120
		c	80
		d	100
		e	39
		f	94.5
		g	104
		h	114
cable nominal cross-section area(mm ²)		6~16	16~50



3P+E



4P+E



5P+E



3P+N+E



110V 50a.60Hz



230V 50a.60Hz



400V 50a.60Hz



500V 50a.60Hz



>500V 100-300Hz




>500V 300-300Hz

工业用插头 Industrial plug



HFN-413 HFN-423

电流 Current (A) : 16A.32A
 电压 Voltage(V): 220~240V~2P+E
 防护等级 Protection degree: IP44




earth contact position		6h	
rated current(A)		16	32
pole		3	
dimension(mm)		a	85
		b	85
		c	70
		d	70
		e	12
		f	23
		g	60
		h	60
		i	51
cable nominal cross-section area(mm ²)		5.5	64



HFN-413 HFN-423

电流 Current (A) : 16A.32A
 电压 Voltage(V): 220~240V~2P+E
 防护等级 Protection degree: IP44




earth contact position		6h	
rated current(A)		16	32
pole		3	
dimension(mm)		a	85
		b	85
		c	70
		d	70
		e	12
		f	23
		g	60
		h	60
		i	51
cable nominal cross-section area(mm ²)		5.5	64



HFN-4142 HFN-4242

电流 Current (A) : 16A.32A
 电压 Voltage(V): 380~415V~3P+E
 防护等级 Protection degree: IP44




CCC 认证 CE 认证产品 POHS 环保认证

工业用插头 Industrial plug



HFN-3352

电 流 Current (A) : 63A.125A
 电 压 Voltage(V): 220-380V~3P+N+E
 防护等级 Protection degree: IP67



earth contact position		6h	
rated current(A)	pole	63	125
dimension(mm)	pole	5	
a	100	120	
b	100	101	
c	80	101	
d	80	44	
e	35	106	
f	96	84	
o	73	7	
i	7	7	
cable nominal cross-section area(mm²)	6-16	16-50	


3
2P+E4
3P+E5
3P+N+E110V
50a.60Hz
3pol 4pol 5pol
4h 6h 9h230V
50a.60Hz
3pol 4pol 5pol
6h 9h 9h400V
50a.60Hz
3pol 4pol 5pol
9h 6h 6h500V
50a.60Hz
3pol 4pol 5pol
7h 7h 7h>50-
500V
100-
300Hz
3pol 4pol 5pol
10h 10h 10h>50-
500V
300-
300Hz
3pol 4pol 5pol
2h 2h 2h

CCC 认证 CE 认证产品 POHS 环保认证



HFN-414

电 流 Current (A) : 16A.32A
 电 压 Voltage(V): 380-415V~3P+E
 防护等级 Protection degree: IP44




earth contact position		6h	
rated current(A)	pole	16	32
dimension(mm)	pole	4	
a	85	85	
b	85	70	
c	70	70	
d	70	44	
e	33	60	
f	60	60	
g	51	64	
h	56	76	
i	5.5	5.5	
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



HFN-424

电 流 Current (A) : 16A.32A
 电 压 Voltage(V): 380-415V~3P+E
 防护等级 Protection degree: IP44




earth contact position		6h	
rated current(A)	pole	16	32
dimension(mm)	pole	4	
a	85	85	
b	85	70	
c	70	70	
d	70	44	
e	33	60	
f	60	60	
g	51	64	
h	56	76	
i	5.5	5.5	
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



HFN-4142

电 流 Current (A) : 16A.32A
 电 压 Voltage(V): 380-415V~3P+E
 防护等级 Protection degree: IP67




earth contact position		6h	
rated current(A)	pole	16	32
dimension(mm)	pole	4	
a	85	85	
b	85	70	
c	70	70	
d	70	44	
e	33	60	
f	60	60	
g	51	64	
h	56	76	
i	5.5	5.5	
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



HFN-415

电 流 Current (A) : 16A.32A
 电 压 Voltage(V): 220-380V~3P+N+E
 防护等级 Protection degree: IP44




earth contact position		6h	
rated current(A)	pole	16	32
dimension(mm)	pole	5	
a	85	85	
b	85	70	
c	70	70	
d	70	44	
e	33	60	
f	60	60	
g	51	64	
h	56	76	
i	5.5	5.5	
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



HFN-4152

电 流 Current (A) : 63A.125A
 电 压 Voltage(V): 220-380V~3P+N+E
 防护等级 Protection degree: IP67




earth contact position		6h	
rated current(A)	pole	63	125
dimension(mm)	pole	5	
a	85	85	
b	85	70	
c	70	70	
d	70	44	
e	33	60	
f	60	60	
g	51	64	
h	56	76	
i	5.5	5.5	
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



HFN-4332-4

电 流 Current (A) : 63A.125A
 电 压 Voltage(V): 110-130V~2P+E
 防护等级 Protection degree: IP67





earth contact position		4h	
rated current(A)	pole	63	125
dimension(mm)	pole	3	
a	101	120	
b	113	131	
c	80	100	
d	89	108	
e	64	82	
f	83	92	
g	79	92	
h	92	104	
i	7	7.5	
cable nominal cross-section area(mm²)	6-25	16-50	

工业用插头 Industrial plug



HFN-4332

电流 Current (A) : 63A.125A
电压 Voltage(V): 220~250V~2P+E
防护等级 Protection degree: IP67





earth contact position	6h	
rated current(A)	63	125
pole	3	3
dimension(mm)	a b c d e f g h i	101 113 131 100 89 64 87 83 79 92 92 7 104 7.5
cable nominal cross-section area(mm^2)	6-25	16-50



HFN-4342

电流 Current (A) : 63A.125A
电压 Voltage(V): 380~415V~3P+E
防护等级 Protection degree: IP67





earth contact position	6h	
rated current(A)	63	125
pole	4	4
dimension(mm)	a b c d e f g h i	101 113 131 100 89 64 87 83 79 92 92 7 104 7.5
cable nominal cross-section area(mm^2)	6-25	16-50



HFN-4352

电流 Current (A) : 63A.125A
电压 Voltage(V): 220~380V~3P+N+E
防护等级 Protection degree: IP67





earth contact position	6h	
rated current(A)	63	125
pole	5	5
dimension(mm)	a b c d e f g h i	101 113 131 100 89 64 87 83 79 92 92 7 104 7.5
cable nominal cross-section area(mm^2)	6-25	16-50



HFN-513

电流 Current (A) : 16A.32A
电压 Voltage(V): 220~250V~2P+E
防护等级 Protection degree: IP44





earth contact position	6h	
rated current(A)	16	32
pole	3	
dimension(mm)	a b	121 76
cable nominal cross-section area(mm^2)	1-2.5	2.5-6






HFN-5132

电流 Current (A) : 16A.32A
电压 Voltage(V): 220~250V~2P+E
防护等级 Protection degree: IP67




earth contact position	6h	
rated current(A)	16	32
pole	3	
dimension(mm)	a b	121 76
cable nominal cross-section area(mm^2)	1-2.5	2.5-6

3
2P+E4
3P+E5
3P+N+E110V
50a.60Hz
3pol
4pol
5pol230V
50a.60Hz
3pol
4pol
5pol400V
50a.60Hz
3pol
4pol
5pol500V
50a.60Hz
3pol
4pol
5pol>50-
500V
100-
300Hz
3pol
4pol
5pol50-
500V
300-
300Hz
3pol
4pol
5pol

HFN-514

电流 Current (A) : 16A.32A
电压 Voltage(V): 380~415V~3P+E
防护等级 Protection degree: IP44




earth contact position	6h	
rated current(A)	16	32
pole	4	
dimension(mm)	a b	121 76
cable nominal cross-section area(mm^2)	1-2.5	2.5-6



HFN-524

电流 Current (A) : 16A.32A
电压 Voltage(V): 380~415V~3P+E
防护等级 Protection degree: IP67




earth contact position	6h	
rated current(A)	16	32
pole	4	
dimension(mm)	a b	121 76
cable nominal cross-section area(mm^2)	1-2.5	2.5-6



HFN-5142

电流 Current (A) : 16A.32A
电压 Voltage(V): 380~415V~3P+E
防护等级 Protection degree: IP67




earth contact position	6h	
rated current(A)	16	32
pole	4	
dimension(mm)	a b	121 76
cable nominal cross-section area(mm^2)	1-2.5	2.5-6



HFN-515

电流 Current (A) : 16A.32A
电压 Voltage(V): 220~380V~3P+N+E
防护等级 Protection degree: IP44




earth contact position	6h	
rated current(A)	16	32
pole	5	
dimension(mm)	a b	121 76
cable nominal cross-section area(mm^2)	1-2.5	2.5-6



HFN-5152

电流 Current (A) : 63A.125A
电压 Voltage(V): 220~380V~3P+N+E
防护等级 Protection degree: IP67




earth contact position

工业用插头 Industrial plug



电流 Current (A) : 63A.125A
电压 Voltage(V): 380~415V~3P+E
防护等级 Protection degree: IP67




HFN-6342

earth contact position		6h		
rated current(A)	63	125		
pole	4			
dimension(mm)	a b c d e f g h i	100 80 80 13 99 73 6	120 101 22 110 84 6	
cable nominal cross-section area(mm²)	6-16	16-50		

3
2P+E4
3P+E5
3P+N+E3pol
4h3pol
6h3pol
9h3pol
6h3pol
10h3pol
2h3pol
10h3pol
2h

电流 Current (A) : 16A.32A
电压 Voltage(V): 220~250V~2P+E
防护等级 Protection degree: IP44

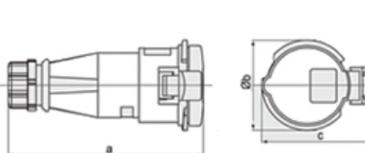


HFN-213 HFN-213 蓝色

earth contact position		6h	
rated current(A)	16	16	
pole	3		
dimension(mm)	a b c	162 60 83	162 60 83
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



电流 Current (A) : 16A.32A
电压 Voltage(V): 220~250V~2P+E
防护等级 Protection degree: IP44



HFN-013

earth contact position		6h	
rated current(A)	16	32	
pole	3		
dimension(mm)	a b c d sw	118 82 47 6-15 38	146 100 63 10-20 50
cable nominal cross-section area(mm²)	1-2.5	2.5-6	




电流 Current (A) : 16A
电压 Voltage(V): 220~250V~2P+E
防护等级 Protection degree: IP44

earth contact position		6h	
rated current(A)	16	16	
pole	3		
dimension(mm)	a b c φ	131 68 50 6	131 68 50 6
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



电流 Current (A) : 16A.32A
电压 Voltage(V): 220~250V~2P+E
防护等级 Protection degree: IP44



HFN-013 HFN-013 蓝色

earth contact position		6h	
rated current(A)	16	16	
pole	3		
dimension(mm)	a b c d	142 105.5 59 53	142 105.5 59 53
cable nominal cross-section area(mm²)	1-2.5	2.5-6	




电流 Current (A) : 16A
电压 Voltage(V): 220~250V~2P+E
防护等级 Protection degree: IP44

earth contact position		6h	
rated current(A)	16	16	
pole	3		
dimension(mm)	axb cxd e f g h i	55 45 35 50 5.5 35 80	55 45 35 50 5.5 35 80
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



电流 Current (A) : 10A
电压 Voltage(V): 380~450V~7P+E
防护等级 Protection degree: IP44



HF-018 HF-019

earth contact position		6h	
rated current(A)	16	32	
pole	8		
dimension(mm)	a b c d	142 105.5 59 53	142 105.5 59 53
cable nominal cross-section area(mm²)	1-2.5	2.5-6	




电流 Current (A) : 16A
电压 Voltage(V): 220~250V~2P+E
防护等级 Protection degree: IP44

earth contact position		6h	
rated current(A)	16	16	
pole	3		
dimension(mm)	axb cxd e f g h i	55 45 35 50 5.5 35 80	55 45 35 50 5.5 35 80
cable nominal cross-section area(mm²)	1-2.5	2.5-6	



电流 Current (A) : 16A.32A
电压 Voltage(V): 220~250V~2P+E
防护等级 Protection degree: IP44



HFN-213

earth contact position		6h	
rated current(A)	16	32	
pole	3		
dimension(mm)	a b c d sw	129 42 76 6-16 38	129 42 76 6-16 38
cable nominal cross-section area(mm²)	1-2.5	1-2.5	



电流 Current (A) : 16A
电压 Voltage(V): 380~415V~7P+E
防护等级 Protection degree: IP44


earth contact position		6h	
rated current(A)	10	10	
pole	3		

CCC 认证 CE 认证产品 POHS 环保认证

工业用插头 Industrial plug




电 流 Current (A) : 16A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44



极数 (P)	3
尺寸 (mm)	
a	50.6
b	65
c	41
d	26
e	38.5
f	38.5
g	5
导线截面mm ²	1-2.5




电 流 Current (A) : 16A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44



极数 (P)	3
尺寸 (mm)	
a	50.6
b	65
c	41
d	26
e	38.5
f	38.5
g	5
导线截面mm ²	1-2.5




电 流 Current (A) : 16A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44



极数 (P)	3
尺寸 (mm)	
a	54
b	73
c	64
导线截面mm ²	1-2.5




电 流 Current (A) : 16A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44




极数 (P)	3
尺寸 (mm)	
a	104
b	42
c	5
导线截面mm ²	1-2.5




电 流 Current (A) : 16A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44




极数 (P)	3
尺寸 (mm)	
a	54
b	73
c	64
导线截面mm ²	1-2.5

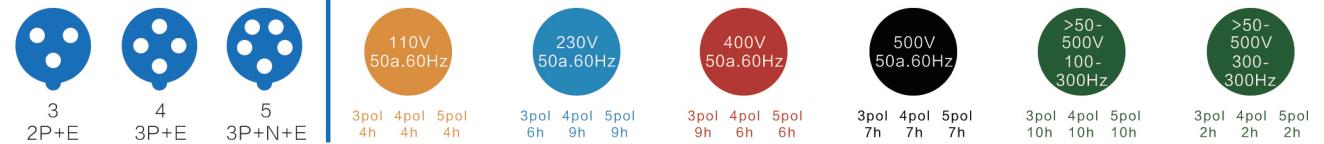


CCC 认证 CE 认证产品 POHS 环保认证

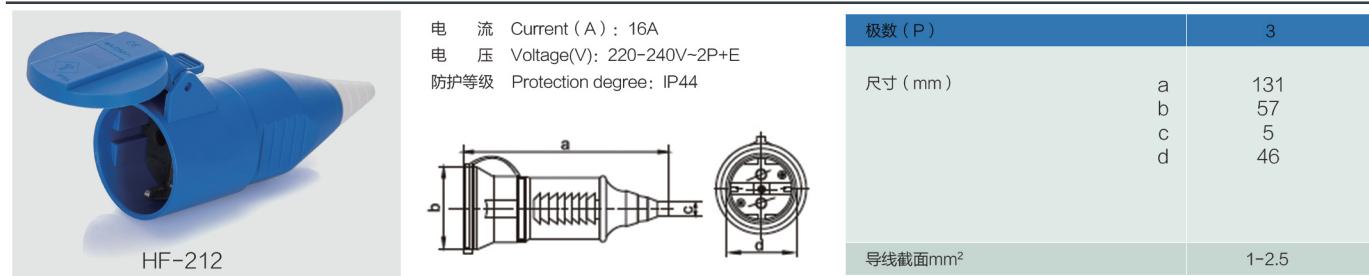


电 流 Current (A) : 16A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44

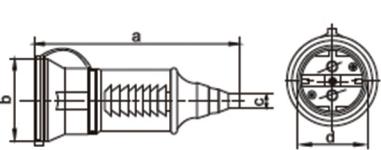

极数 (P)	3
尺寸 (mm)	
a	131
b	57
c	5
d	46
导线截面mm ²	1-2.5

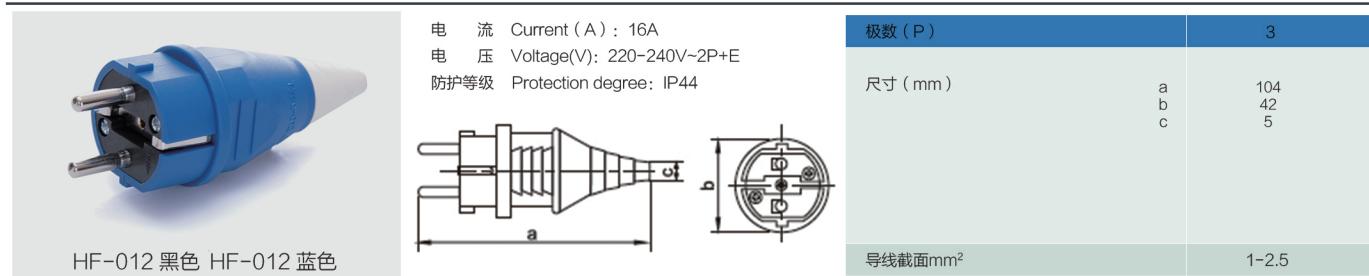

电 流 Current (A) : 16A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44

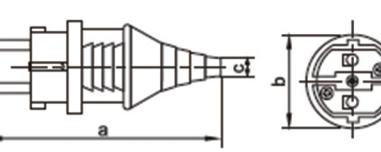

极数 (P)	3
尺寸 (mm)	
a	104
b	42
c	5
导线截面mm ²	1-2.5

